

08/09/99

U.S. P.O.

"Express Mail" mailing label number EL272345559US.  
 Date of Deposit August 9, 1999

A  
MicroCase No. 6270/26

# PATENT APPLICATION TRANSMITTAL LETTER

Be Assistant Commissioner for Patents:

Transmitted herewith for filing is the patent application of: Simon H. Lightbody, Peter C. Cowan, David W. Giles, Marcus F. Hirschbold  
 and Rene T. Jonker for: EXTERNAL COMMUNICATIONS INTERFACE FOR A REVENUE METER. Enclosed are:

- ☒ 18 sheet(s) of drawings, 30 pages of application (including title page), and the following Appendices: App. A and B.
- ☐ Declaration.
- ☐ Power of Attorney.
- ☐ Verified statement to establish small entity status under 37 CFR §§ 1.9 and 1.27.
- ☐ Assignment transmittal letter and Assignment of the invention to: \_\_\_\_\_
- ☐ \_\_\_\_\_

1c525 U.S. PTO  
 09/370696  
 08/09/99

Claims as Filed	Col. 1	Col. 2
For	No. Filed	No. Extra
Basic Fee		
Total Claims	8-20	0
Indep. Claims	2-3	0
Multiple Dependent Claims Present		

\*If the difference in col. 1 is less than zero, enter "0" in col. 2.

Small Entity		or	Other Than Small Entity	
Rate	Fee		Rate	Fee
	\$ 380	or		\$ 760
x\$9=	\$	or	x\$18=	\$
x\$39=	\$	or	x\$78=	\$
+\$130=	\$	or	+\$260=	\$
Total	\$	or	Total	\$760

- ☐ Please charge my Deposit Account No. 23-1925 in the amount of \$: \_\_\_\_\_. A duplicate copy of this sheet is enclosed.
- ☐ A check in the amount of \$: \_\_\_\_\_ to cover the filing fee is enclosed.
- ☒ The Assistant Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to Deposit Account No. 23-1925. A duplicate copy of this sheet is enclosed.
- ☒ Any additional filing fees required under 37 CFR § 1.16.
- ☒ Any patent application processing fees under 37 CFR § 1.17.
- ☐ The Assistant Commissioner is hereby authorized to charge payment of the following fees during the pendency of this application or credit any overpayment to Deposit Account No. 23-1925. A duplicate copy of this sheet is enclosed.
- ☐ Any filing fees under 37 CFR § 1.16 for presentation of extra claims.
- ☐ Any patent application processing fees under 37 CFR § 1.17.
- ☐ The issue fee set in 37 CFR § 1.18 at or before mailing of the Notice of Allowance, pursuant to 37 CFR § 1.311(b).

Date

8/9/99

James L. Katz  
 BRINKS HOFER GILSON & LIONE  
 Registration No. 42,711

"Express Mail" mailing label number EL272345559US

Date of Deposit: August 9, 1999

Our Case No. 6270/26

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE  
APPLICATION FOR UNITED STATES LETTERS PATENT

INVENTOR:

Simon H. Lightbody  
Peter C. Cowan  
David W. Giles  
Markus F. Hirschbold  
Rene T. Jonker

TITLE:

EXTERNAL COMMUNICATIONS  
INTERFACE FOR A REVENUE  
METER

ATTORNEY:

GUSTAVO SILLER  
VINCENT J. GNOFFO  
BRINKS HOFER GILSON & LIONE  
P.O. BOX 10395  
CHICAGO, ILLINOIS 60610  
(312) 321-4200

## EXTERNAL COMMUNICATIONS INTERFACE FOR A REVENUE METER

### CROSS REFERENCE TO RELATED APPLICATIONS

The following co-pending and commonly assigned U.S. patent applications have been filed on the same date as the present application. All of these applications relate to and further describe other aspects of the embodiments disclosed in the present application and are all herein incorporated by reference.

U.S. Pat. Application Ser. No. \_\_\_\_\_, "REVENUE METER WITH POWER QUALITY FEATURES", (Attorney Ref. No. 06270/22), filed \_\_\_\_\_.

U.S. Pat. Application Ser. No. \_\_\_\_\_, "A-BASE REVENUE METER WITH POWER QUALITY FEATURES", (Attorney Ref. No. 06270/32), filed \_\_\_\_\_.

U.S. Pat. Application Ser. No. \_\_\_\_\_, "REVENUE METER WITH GRAPHIC USER INTERFACE", (Attorney Ref. No. 06270/23), filed \_\_\_\_\_.

U.S. Pat. Application Ser. No. \_\_\_\_\_, "REVENUE METER BLADE ASSEMBLY AND METHOD OF ATTACHMENT", (Attorney Ref. No. 06270/25), filed \_\_\_\_\_.

U.S. Pat. Application Ser. No. \_\_\_\_\_, "A POWER SYSTEM TIME SYNCHRONIZATION DEVICE AND METHOD FOR SEQUENCE OF EVENT RECORDING", (Attorney Ref. No. 06270/24), filed \_\_\_\_\_.

U.S. Pat. Application Ser. No. \_\_\_\_\_, "METHOD AND APPARATUS FOR AUTOMATICALLY CONTROLLED GAIN SWITCHING OF POWER MONITORS", (Attorney Ref. No. 06270/27), filed \_\_\_\_\_.

U.S. Pat. Application Ser. No. \_\_\_\_\_, "A KEYPAD FOR A REVENUE METER", (Attorney Ref. No. 06270/34), filed \_\_\_\_\_.

## REFERENCE TO MICROFICHE APPENDIX

A microfiche appendix, Appendix A, is included of a computer program listing. The total number of microfiche is 6. The total number of frames is 186. A second microfiche appendix, Appendix B, is also included of schematic diagrams. The total number of microfiche is 1 and the total number of frames is 23.

## COPYRIGHT NOTICE

A portion of the disclosure of this patent document contains material which is subject to copyright protection. The copyright owner has no objection to the facsimile reproduction by anyone of the patent document or the patent disclosure, as it appears in the Patent and Trademark Office patent file or records, but otherwise reserves all copyright rights whatsoever.

## FIELD OF THE INVENTION

Generally, this invention relates to revenue meters of the type used by energy suppliers to accurately measure electrical energy delivered to consumers. More particularly, this invention relates to improved interfacing of the revenue meters.

## BACKGROUND OF THE INVENTION

In a typical electrical distribution system, an electrical supplier or utility company generates electrical energy and distributes the electrical energy to consumers via a power distribution network. The power distribution network is the network of electrical distribution wires which link the electrical supplier to its consumers. At the consumer's facility, there will typically be an electrical energy meter (revenue meter) connected between the consumer and the power distribution network to measure the consumer's electrical demand. The revenue meter is an electrical energy measurement device which accurately measures the amount of electrical energy flowing to the consumer from the supplier. The amount of electrical energy measured by the meter is

then used to determine the amount required to compensate the energy supplier.

To provide user input to the revenue meter, known meters typically utilize cumbersome keys or buttons located within a sealed cover of the revenue meter, or keys which are accessible from the outside but are sealed and cannot be activated without removing the seal. In both cases, at least one security seal is installed to prevent or indicate unauthorized access. Thus, the seal must be replaced every time the meter is accessed.

A problem exists when keys are added to the cover to access the revenue meter since tolerances in both the manufactured parts and the assembly process can cause an internal structure of the assembled revenue meter to misalign with the cover, for example, lean and twist with relation to the cover. Yet, it is important to line up the keys on the cover with the appropriate buttons on the revenue meter.

Another problem stems from the fact that typical socket based revenue electricity meters provide Input and Output (I/O) ports. These ports can be analog or digital, inputs or outputs. Analog inputs are capable of measuring a 4-20mA input signal which may indicate, for example, temperature from an external transducer. Moreover, analog outputs typically generate 4-20mA outputs that indicate, for example, power being measured by the meter. Digital inputs typically connect to external contacts which may indicate, for example, the position of a switch in the substation. Moreover, digital outputs may be solid state relays capable of switching small loads on and off.

Known revenue meters typically use two methods of obtaining the I/O signals for the I/O from the revenue meter. The first method utilizes individual wires for each I/O port. The second method uses an industry standard communications protocol over, for instance, twisted pair communications wiring to communicate with an external third party device which provides the I/O ports.

On the one hand, since ANSI standard revenue metering sockets were not designed with I/O in mind, bringing I/O ports out of the meter on individual wires presents numerous problems. First, no provision exists for rendering

the ports on terminals since the standard socket does not provide any. Therefore, the ports must exit the meter on individual wires. All signals, except voltage and current, must exit through a small port on the back of the socket. The amount of space available for this port is limited, therefore the number and size of wires that can exit the device is limited. Yet, known revenue meters may be required to provide a bundle of cables with a large amount of conductors to accommodate I/O and communication signals.

In addition, since the I/O circuitry is located inside the revenue meter, the revenue meter's size must increase to accommodate the circuitry. Additionally, the revenue meter must dissipate the additional heat generated by the I/O circuitry. Moreover, when an installer installs the device, they are faced with sorting out a large bundle of wires, typically by color coding, which is prone to error. The bundle of conductors are cumbersome to handle, and the area to access and connect the conductors is often limited. Finally, the I/O signal wires must be extended and routed to devices that may be located a great distance away from where the revenue meter is mounted.

On the other hand, using an industry standard communications protocol to communicate from the meter to an external I/O device solves many of the problems that accompany the internal I/O, but creates additional problems. Known standard communications interfaces typically do not provide a way to timestamp the absolute time that the input state was recorded, which is an important feature to various functions of the revenue meter. Even when this capability is provided, there is typically no way to ensure that the absolute time reference of the external I/O device and the revenue meter are the same. In addition, standard communications interfaces are typically bus architectures. Therefore, transferring I/O information from the external I/O device to and from the meter may be delayed by other devices using the bus. Also, known external I/O devices are often complicated to configure. In addition, standard external I/O devices must have dedicated power supplies which means additional wiring must be installed.

Thus, there is a need for an improved revenue meter that provides an easily accessible and easy to use interfaces. This includes both a front panel, as well as I/O and communications connections. In addition, there is a need for an improved revenue meter with an I/O and communications interface that is located separate from the revenue meter. In addition, there is a need for an external I/O device that is easy for the user to configure, hence reducing installation time. Moreover, there is a need for an I/O and communications interface that is expandable and not limited to the number of conductors leaving the revenue meter.

## SUMMARY OF THE INVENTION

Such needs are met or exceeded by the present interfaces for a revenue meter. In general, the revenue meter of the present invention provides easily accessible and easy to use interfaces that include a front panel keypad and I/O and communications connections. The keypad allows a user to interact with the meter without requiring a breach to a security seal. Moreover, the external I/O and communication interface is expandable and allows easy connection to and detachment from the revenue meter.

More specifically, the preferred embodiment of the present invention revenue meter includes electronics for measuring the delivery of electrical energy from an energy supplier to a consumer through an electric circuit. An interface link connects to the revenue meter. An I/O and communications device connects to the interface link. The I/O and communications device uses the interface link to communicate with the revenue meter. The I/O and communications device provides one or more of analog inputs and outputs, digital inputs and outputs, and communications ports.

## BRIEF DESCRIPTION OF THE DRAWINGS

Other features and advantages of the invention will be apparent to those skilled in the art with reference to the detailed description and the drawings, of which:

Figure 1 depicts a perspective view of an exemplary S-Base revenue meter, and meter cover, which connects to the interfaces of the present invention;

FIG. 2 shows a perspective view of an exemplary A-Base revenue meter, and meter cover, which connects to the interfaces of the present invention;

FIG. 3 depicts a perspective view of an exemplary Switchboard revenue meter, and meter cover, which connects to the interfaces of the present invention;

FIG. 4A shows a front side perspective view of an upper portion of the meter cover for an S-base and A-base revenue meters shown in FIGS. 1 and 2, including receptacles for a keypad according to the present invention;

FIG. 4B depicts a backside perspective view of the upper portion of the meter cover for an S-base and A-base revenue meter according to FIG. 4A;

FIG. 5A depicts a cross-sectional view of an exemplary elastomer keypad according to a preferred embodiment of the present invention;

FIG. 5B shows a bottom perspective view of the elastomer keypad depicted in FIG. 5A;

FIG. 5C depicts a top perspective view of the elastomer keypad shown in FIG. 5A;

FIG. 6A shows a partial cross-sectional view of the scroll button mechanism according to a preferred embodiment of the present invention;

FIG. 6B shows a partial cross-sectional view of a demand reset key button mechanism according to a preferred embodiment of the present invention;

FIG. 7A shows a top view of a bezel according to a preferred embodiment of the present invention;

FIG. 7B depicts a cross-sectional view along line 7B-7B of the bezel shown in FIG. 7A;

FIG. 7C shows a top perspective view of the bezel shown in FIG. 7A;

FIG. 7D depicts a bottom perspective view of the bezel shown in FIG. 7A;



FIG. 8 shows a partially assembled S-base meter depicted in FIGS. 1 and 2, without the cover;

FIG. 9 depicts the bezel shown in FIGS. 7A-7D, with a compression plate abutting infrared bosses to align to the cover according to a preferred embodiment of the present invention;

FIG. 10 depicts a front perspective view of an exemplary external enclosure of the I/O and communications device according to a preferred embodiment of the present invention;

FIG. 11 shows the revenue meter of FIGS. 1-3, with an exemplary serial link interface of a preferred embodiment of the present invention; and

FIG. 12A-12D show a flow chart representing serial communication and operations between the revenue meter and the I/O communications device according to a preferred embodiment of the present invention.

## DETAILED DESCRIPTION OF THE INVENTION

The revenue meter of the present invention provides easily accessible and easy to use interfaces that include a front panel keypad, and I/O and communications connections. The keypad allows a user to interact with the meter without requiring a breach to a security seal. For example, the user may need to access a central processing unit (CPU) of the revenue meter to program the meter, to retrieve revenue data, and to retrieve power quality data. In addition, the interface provides an external I/O and communication interface that is expandable and not limited to the number of conductors leaving the revenue meter. Moreover, connection to, and detachment from, the interface is simplified through the use of a single cable protruding from the revenue meter to create the connection.

Revenue meters must comply with American National Standards Institute's (ANSI) Standards for electric meters which include, but are not limited to, the following:

- ANSI C12.1 (1995): American National Standard for Electric Meters-  
Code for Electricity Metering
- ANSI C12.10 (1987): American National Standard for  
Electromechanical Watthour Meters

ANSI C12.13 (1991): American National Standard for Electronic Time  
of Use Registers for Electricity Meters

ANSI C12.16 (1991): American National Standard for Solid-State  
Electricity Meters

ANSI C12.20 (1998): American National Standard for Electricity Meters  
0.2 and 0.5 Accuracy Classes

All of which are known in the art and are herein incorporated by  
reference.

Other specification/standards which apply to revenue meters include  
ISO Specification MTR1-96, "Engineering Specification for Polyphase Solid  
State Electricity Meters for Use on the ISO Grid," herein incorporated by  
reference.

Referring to the drawings, and particularly FIG. 1-3, the ANSI  
standards define two general types of revenue meters, socket based ("S-  
base" or "Type S") (shown in FIG. 1) and bottom connected ("A-base" or  
"Type A") (shown in FIG. 2). A third type of revenue meter, known as a  
"Switchboard Meter" or "Draw-out Meter", is also commonly used in the  
industry (shown in FIG. 3). These types of revenue meters are distinguished,  
in at least one respect, by the method in which they are connected to the  
electric circuit that they are monitoring.

Referring to FIG. 1, the S-base revenue meter is shown, designated  
generally as 20. An exemplary S-base revenue meter is the 8500 ION  
Revenue Meter manufactured by Power Measurement Limited, Saanichton,  
British Columbia, Canada. S-base meters feature blade type terminals (not  
shown) disposed on a base 21 of the meter. These blade terminals are  
designed to mate with matching jaws of a detachable meter mounting device  
such as a revenue meter socket 22. The socket 22 is hard wired to an  
electrical circuit (not shown) and is not meant to be removed. An exemplary  
meter socket is the 3000 Series manufactured by Meter Devices Co., Inc.,  
Canton, Ohio.

S-base meters include a cover 24 which encloses the meter's  
electronics 26 and display 28. A sealing mechanism 30 secures the cover 24  
to prevent unauthorized access to the meter electronics 26. Removal of the

meter necessitates disengaging a t-seal (not shown) that seals the cover 24 and the revenue meter 20, which would indicate unauthorized tampering. A context adaptable input device, such as a keypad 32, is provided on a top portion 33 of the cover to allow access to the meter's electronics without requiring removal of the cover 24, described below. Artisans will appreciate that the keypad 32 can be replaced with other input devices, such as a touch screen, a mouse, a track ball, a light pen, a membrane switch, or other similar device.

Referring to FIG. 2, an A-base revenue meter is shown, designated generally as 34. The A-base meter 34 features bottom connected terminals 36 on the bottom side 38 of the meter. The terminals 36 are typically screw terminals for receiving the conductors of the electric circuit. A-base meters 34 are directly connected to the electric circuit and can only be installed or removed by connecting or disconnecting the conductors of the electric circuit. Typically, this means tightening or loosening each terminal 36 to secure or free the end of the conductor. A-base meters 34 utilize cover 24 to enclose the meter electronics and the display. As described with regard to the S-base revenue meter 20, the A-base meter typically utilizes a t-seal to prevent unauthorized tampering with the meter electronics 26. For the purposes of this disclosure, A-base meters also include S-base meters in combination with A-base adapters 40. An exemplary A-base adapter is the Polyphase Transformer Rated A to S Adapter manufactured by Ekstrom Industries, Incorporated, Farmington Hills, Michigan.

Referring to FIG. 3, there is shown a Switchboard Meter, designated generally as 42. The Switchboard meter 42 consists of a switchboard enclosure 44 which is physically mounted and connected to the electrical circuitry. Exemplary enclosures are the ABB FT-21 and ABB-FT-32 manufactured by ABB, Raleigh, North Carolina. The switchboard meter 42, which includes the meter electronics 26 and display 28, is mounted on a draw-out chassis 46 which is removable from the switchboard enclosure 44. The draw-out chassis 46 interconnects the meter electronics 26 with the electrical circuit. The enclosure 44 also has a cover 48 which completely

seals the meter inside the enclosure. The cover 48 includes the keypad 32 or input device for accessing the meter's electronics 26. The cover 48 has a sealing mechanism 50 which prevents removal of the cover 48 and indicates when the cover 48 has been tampered with.

5 Referring to FIGS. 1-3, the S-base and A-base revenue meters' cover 24, and the Switchboard revenue meter's cover 48, are at least partially transparent. The transparency permits viewing of the meter's display 28 including a graphic user interface (GUI)(not shown) without having to remove the cover 24. As mentioned above, the meter cover 24 provides the context  
10 adaptable input device such as the keypad 32 for interacting with the revenue meter while the meter cover 24, 48 remains in place. Artisans will appreciate that the keypad 32 can be replaced with other context adaptable input devices, such as a touch screen, a mouse, a track ball, a light pen, a membrane switch, or other similar device.

15 Referring also to FIG. 4A, the top portion 33 of the cover preferably includes openings to accommodate scroll buttons 52 and an enter button 53 of the keypad 32. In addition, the top portion 33 of the cover includes an infrared locating member 54 which allows optical couplers (not shown) to access infrared emitters (not shown). Moreover, the top portion 33 of the  
20 cover provides a reset demand key wall 56 to sealingly accommodate a known reset demand key of the revenue meter. The top portion 33 also provides water proofing keypad sealing walls 58.

The keypad 32 presents information (i.e., the state of the input hardware such as buttons) or messages to a microprocessor, microcontroller  
25 or other central control device via the GUI, which in turn performs actions depending on the type of input and the current operating mode of the revenue meter 20, 34, 42. The GUI and a description of the operating modes is discussed in commonly owned U.S. Pat. Application Ser. No. \_\_\_\_\_, "REVENUE METER WITH GRAPHIC USER INTERFACE", filed \_\_\_\_\_,  
30 which is incorporated by reference herein.

In a preferred embodiment the keypad 32 includes an up arrow button 52a a down arrow button 52b and the enter button 53. It will be recognized by

those skilled in the art that other suitable buttons may be used. For example, the invention may be implemented using left and right arrow keys, other key arrangements as well as programmable soft keys. The revenue meter 20, 34, 42 is configured to normally scroll through predefined parameters on the screen 28. In one embodiment, to temporarily freeze the automatic scrolling of the display, the user presses either of the arrow buttons 52a, 52b. The user may then manually scroll through the display by using the buttons 52a and 52b. The enter button 53 may be used to toggle between various available modes of the revenue meter 20, 34, 42. The modes may include, for example, two display modes - a Norm mode and an Alt mode. The enter button 53 may also be used to view a setup menu.

In addition, the GUI is programmable to allow the revenue meter 20, 34, 42 to be customized via the keypad 32 to a particular application, presenting the user only with information required by the user. The GUI can be programmed using the keypad 32, or other suitable input device, or through one of the communication ports, described below.

In addition, the user may also use the keypad 32 or other suitable input device to navigate through a hierarchic menu system for meter configuration or GUI customization. In the preferred embodiment, the meter 20, 34, 42 is provided with a default set of display screens and hierarchic interface menus, which can be re-programmed through the user interface itself or through the communications ports. The information to be displayed on the display screen, consists of graphical objects such as scalable text, lines, circles rectangles, charts, etc. For each screen, a template is provided which in turn provides information on how the screen is laid out. Preferably, the template provides information on the appearance and location of the graphical objects.

The hierarchic menu system is activated by some input key combination, for example by holding the enter button 53 for an extended period of time. The hierarchic menu system can be implemented using a scrollable menu system with a simple up key 52a, down key 52b and enter button 53, i.e. the three-key interface used to navigate a set of menu choices. The up/down buttons 52a , 52b select the previous/next items in a list. The

list is shown as a text list with the current item in the list highlighted in some fashion, either by inverting or changing the colors in some way or surrounding the highlighted item using a rectangle. When the enter input is activated using the enter button 53, the highlighted input is selected and the appropriate function is performed: either a new menu list is selected, a single item is selected (such as yes/no) or the user is presented with a changeable parameter. If the parameter is numeric, the up and down keys 52a, 52b will increment it. If the parameter has numerous numeric fields, holding the up or down arrow buttons 52a, 52b will activate the next/previous numeric field. Just pressing the up/down buttons 52a, 52b will then once again increment/decrement the numeric entry. Hitting the enter button 53 will accept the input value and perform the appropriate action, such as checking/asking for the password and/or confirmation.

Preferably, when the revenue meter 20, 34, 42 is in display mode, the up/down buttons 52a, 52b select either the next or previous display screen in a programmable list of display screens. If no direct user input is provided, the meter will automatically proceed to the next display screen after a preset programmable interval.

Other user interface functions can be implemented using various different combinations of the inputs. For example, the contrast change mode can be activated by simultaneously activating the up/down arrow keys 52a, 52b.

Referring to FIGS. 4B and 5A-5C, to provide a watertight interface between the keypad 32 and the cover 24, a backside of the top portion 33 of the cover 24 includes sealing walls 58. Infrared light pipes 59 are also included on the backside of the top portion 33 of the cover 24. As described, the keypad 32 of the revenue meter 20, 34, 42 utilizes an elastomer keypad. The sealing walls 58 sealing engage the elastomer keypad 32. The keypad 32 includes at least one button, e.g., scroll buttons 52, with a plunger 64, and a web 66 portion which allows the plunger to move in a direction generally perpendicular to the keypad 32.

To protectively seal the revenue meter 20, 34, 42 from outside elements, such as rain, a compression plate 68 compresses the elastomer keypad 32 to the sealing walls 58. The compression plate 68 preferably is screwed to the cover 24 via bosses 70. It can be appreciated, however, that other fasteners, such as rivets and snap features within the plastic, can be used to attach the compression plate 68 to the cover 24. The sealing walls 58 and the compression plate 68 compress the keypad 32 to form a seal around each key 52 on the keypad 32. The sealing bosses 70 pass through corresponding holes 71 in the keypad 32 (seen best in FIGS. 5B and 5C) to be in direct contact with the compression plate 68. Thus, a seal that meets ANSI specifications is formed between the keypad 32 and the sealing walls 58. It can be appreciated that the keypad can be replaced with a weather proof touch screen or membrane switch mounted on the cover to eliminate the need for sealing ribs and a compression plate. It can also be appreciated that the keypad can be welded or molded directly into the cover to eliminate the need for a compression plate.

Referring to FIGS. 6A and 6B, to mechanically connect the keypad 32 to the revenue meter 26, intermediate actuators 72 transfer the keypad's motion to micro switches 74 mounted on a printed circuit board 76. Referring also to FIGS. 7A-7D, according to a preferred embodiment, the intermediate actuators 72 are contained within bezel 78. The intermediate actuators 72 include intermediate key actuators 72a, an intermediate reset demand actuator 72b, and an intermediate test mode actuator 72c which is accessible only when the cover 24 is removed. Thus, unlike known demand reset keys which includes multiple parts, including a spring, fasteners and lever arms, the bezel 78 of the present invention allows for a one piece demand reset key.

When the user depresses keys 52, the web 66 (shown best in FIG. 5A) allows the plunger 64 to interact with the intermediate actuators 72 located on the bezel 78, which in turn contact the micro switch 74. Preferably, the micro switch 74 has spring back like qualities so that, after it is depressed, it rebounds to aid in the return the plunger 64 to a default position. Preferably, the web 66 and the intermediate actuators 72 have spring back qualities that

also aid in the return of the plunger 64 to the default position. It can be appreciated that the intermediate actuators 72 may be eliminated when the micro switch 74 is mounted to directly contact the plunger 64.

For the keypad 32 to properly function, the keys 52 and the demand reset button 56 must properly align to the intermediate actuators 72 of the bezel 78. In addition, infrared emitters (not shown) located within the infrared locating member 54 must align to the infrared light pipes 59. Referring to FIG. 3, the Switchboard revenue meter 42 experiences similar alignment problems of the keypad 32 to the intermediate actuators 72.

Referring to FIGS. 1 and 2, alignment is more difficult for the S-Base revenue meter 20 and the A-base revenue meter 34, since both the revenue meters 20, 34 and the corresponding covers 24 have a generally cylindrical shape. Referring to FIG. 8, to make alignment even more difficult, the internal structure 79 of the revenue meters 20, 34 may lean and twist after it is assembled. The revenue meter 20, 34 includes a skeleton 80 which accommodates the base 21, the printed circuit board 76, and the bezel 78. In addition, a backdoor 82 attaches to the skeleton 80 to enclose the electronics 26 of the revenue meters 20, 34. Due to tolerances in the manufactured parts and the assembly process, the assembled internal structure 79 may affect the alignment of the keypad 32 to the intermediate actuators 72.

Referring to FIG. 9, to align the keypad 32 to the intermediate actuators 72, a preferred embodiment of the present invention utilizes infrared bosses 84 on the bezel 78 to align the infrared light pipes 59, and a locating portion 86 of the compression plate 68. When assembling the cover 24 to the internal structure 79, the cover is twisted until the base 21 stops the cover 24. The locating portion 86 of the compression plate 68 abuts the infrared bosses 84 to align the internal structure 79 of the revenue meter as the cover 24 is twisted. Thus, when assembling the cover 24, as the location portion 86 of the compression plate 68 abuts the infrared bosses 84, the internal structure 79 twists to align the keypad plungers 64 with the intermediate actuators 72 and to line up the infrared light pipes 59 to the infrared bosses 84. Of course



other methods for aligning the internal structure 79 could be used such as including a post on the cover 24.

Referring to FIG. 10, in addition to the above described keypad for a revenue meter, the present revenue meter 20, 34, 42 includes an external I/O and communications device 88. The I/O and communications device is physically separated from the meter enclosure to improve interfacing capabilities of the revenue meter, as described below. The I/O and communications device 88 includes an I/O and communications connector 90 which accommodates connection to the revenue meter 20, 34, 42 via an interface link 92, shown in FIG. 11. The interface link 92 is preferably located in the base 21 of the meter 20, 34, 42 or at the end of a section of cable 93 protruding from the meter 20, 34, 42. The cable 93 also contains power for the I/O and communications device 88.

In a preferred embodiment, analog and digital signals are transported via a serial link bus terminating in a twenty-four pin connector. Artisans will appreciate that the cable 93 can include a copper or fiber optic interface, or the equivalent, and that pin connectors of differing sizes can be used. Moreover, the I/O and communications device 88 includes alternate connectors 94 to accommodate other connection to the revenue meter, such as a modem and ethernet connections, e.g., RS 232 and RS 485 connections.

The interface link 92 allows for simplified connection of the revenue meter 20, 34, 42 to the I/O and communications device 88. Labeled connectors 90, 94 on the I/O and communications device allow for easy wiring. Plugability of the I/O and communications device to the socket based revenue meter 20, 34, 42 greatly simplifies servicing and replacing of the meter. The meter is removed without having to unscrew or unclamp any communications and I/O connections. In addition, the I/O and communication device 88 eliminates the necessity of locating individual conductors out of a bundle of wires. Connector 90 on the I/O and communication device 88 allows the installer to plug the interface link 92 into the I/O communication device 88 to hook up all wires to the desired I/O and communications ports at once.

In a preferred embodiment, a dedicated microprocessor 95 located inside the I/O and communication device 88 processes I/O and communication data and passes the data to and from the revenue meter 20, 34, 42 via the interface link 92. The interface link 92 connects to the microprocessor via known circuitry. The microprocessor 95 helps to reduce the load on the meter's processor. In addition, the microprocessor 95 allows for I/O and communications that are expandable and not limited to the number of conductors leaving the revenue meter. An exemplary microprocessor is model number PIC16C67 which is manufactured by Microchip Technology, located in Chandler, Arizona. Of course, other microprocessors can be used.

Data flow between the revenue meter 20, 34, 42 and the I/O and communications device 88 is controlled with data packets. Known techniques, such as RS 422, are used to serially send and receive the data packets to the revenue meter 20, 34, 42. In a preferred embodiment, the speed of the interface is 625 kilobits per second (kbps), but other rates are possible. The following description shows exemplary packets that are utilized to transmit between the revenue meter 20, 34, 42 and the external I/O and communications device 88. For the sake of simplicity, the packet transmission is described with reference to only one external I/O and communications device 88. It should be appreciated, however, that the protocol described herein supports one or more external I/O and communications devices 88.

### **Packets**

The first external I/O and communications device 88 is the master on the bus, and thus initiates all data transfers. In a preferred embodiment, the interface is a full-duplex, therefore data flows in both directions at once. The I/O and communications device 88 reports its input states while the revenue meter 20 transmits output states. Preferably, all data packets are error checked using a cyclic redundancy check. If a transmission error is detected, no retry is attempted, the packet is ignored and the states are updated on the next transaction.

Preferably, all packets are fixed length, therefore, the processor receiving the packet always knows where the end of the packet should be. In the following packet descriptions, an 'x' indicates four bits, for example, that are set to indicate a value in the corresponding packet. Artisans will appreciate that the number of bits per packet can be increased to produce a nearly infinite combination of packet values.

### ***Input Packet Structure***

In a preferred embodiment, an input packet is transmitted from the I/O and communications device 88 to the revenue meter 20. The packet indicates the state of the various inputs within the I/O and communications device 88.

Module#	A/D	Mask	Data	Time1	...	Time16	Pckt Time	CRC
00000010XX	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX	XXXX

Module# - The I/O and communications device number (xx) that reports the inputs. Based on the packet structure, up to 256 I/O and communications devices are possible.

Pckt Time – A free running timer value (xxxx) when the transmission of the packet began. In a preferred embodiment, one count occurs per 3.2us.

A/D – 16 bits that indicate whether the, up to, 16 inputs on the device are analog or digital. For example, analog = 1 or digital = 0.

Mask – 16 bits that indicate whether the, up to, 16 inputs on the device have changed since last update. For example, yes = 1 and no = 0.

Data – 16 bits that indicate the digital value of the, up to, 16 inputs on the device.

Time Y – The free running timer value, preferably 3.2 microseconds per count, when the digital input value was recorded if

the corresponding A/D bit is 0. Or, the 16 bit analog value of the input if corresponding A/D bit = 1.

CRC – The packet CRC.

### ***Output Packet Structure***

5 In a preferred embodiment, an output packet is transmitted from the revenue meter 20. The output packet contains the output state that the meter wants to appear on the revenue meter's outputs.

Module#	Data	Analog1	...	Analog16	CRC
00000010XX	XXXX	XXXX	XXXX	XXXX	XXXX

10 Module# - The I/O and communications device number (xx) that is to receive the outputs. Based on the packet size, up to 256 I/O and communications devices are possible.

Data – 16 bits indicating the digital value of the, up to, 16 digital outputs on the device. Each individual bit is ignored by the destination if the output is analog.

15 Analog Z – A 16 bit analog output value for analog output Z. This packet is ignored if the output is digital.

CRC – The packet CRC.

### ***Config Packet Structure***

20 The revenue meter 20 is able to power cycle the master external I/O device. When the master I/O and communications device 88 first powers up, it is responsible for transmitting the CONFIG packet for the master and any attached slave I/O and communications devices. The master I/O and communications device must continue transmitting the CONFIG packet(s)

25 until each CONFIG packet is acknowledged.

Module#	Type 1	...	Type16	CRC
1000000yXX	XXXX	XXXX	XXXX	XXXX

Module# - The external I/O and communications device number that contains the configuration (XX). Based on the packet structure, up to 256 devices are possible. 'y' indicates whether the I/O and communications device is present. For example, present = 1 and absent = 0. Absent packets are only transmitted when the I/O and communications device is removed from a powered system. Since the I/O and communications device 88 cannot initiate the transmission of a CONFIG packet when power is removed, the revenue meter is responsible for detecting that the master I/O and communications device is removed.

Type X – 16 bits indicating the type of input or output of a particular port on the I/O and communications device 88. For example:

Type	Point
0x0	FormA Digital Output
0x1	FormC Digital Output
0x80	DC Digital Input

CRC – The packet CRC.

### **ConfigAck Packet Structure**

A CONFIGACK packet is used by the revenue meter to acknowledge that the CONFIG packet has been received. The master I/O and communications device transmits the CONFIG packet at least twice for each I/O and communications device present in order to receive an acknowledgement since the revenue meter cannot initiate a transfer and data is received from the meter while it is being transmitted by the I/O and communications device.

Module#	Pad	Pad	CRC
10000010XX			XXXX

Module# - The I/O and communications device number (XX) acknowledged by the revenue meter.

5 Pad – Padding for future use.

CRC – The packet CRC.

### Flow diagram

Referring to FIG. 12A, a flow chart is shown to describe a preferred operation of the I/O and communications device 88. After the revenue meter 20, 34, 42 is powered on, preferably a firmware or software initialize routine begins (block 96). The initialize routine initializes variables and buffers that contain counting and input state information (block 98). For example, variables are used to determine a next input to be read.

Referring also to FIG. 12B, on the revenue meter's initialization a routine is called, for example, an initialization subroutine. When the initialization subroutine is called (block 98a), variables used by the bus interface routines are initialized (block 98b) and the bus subsystems and interrupts are enabled (block 98c). Thereafter, the initialization subroutine terminates (block 98d).

Referring to FIG. 12A, the initialize routine initializes I/O ports, e.g., configures pins as either input or output pins (block 100). The I/O ports are used, for example, to control a state of a load, e.g., generator, to turn the load either on or off. In addition, the routine initializes a link utilized to communicate with the revenue meter 20, 34, 42 by setting the speed and format of the data to be transmitted (block 102). For example, the routine configures control registers included in the microprocessor 95 that control the data's speed and format.

Moreover, the routine initializes a free running counter (block 104) and a periodic interrupt (block 106). In a preferred embodiment, an interrupt interrupts the microprocessor 95 every 819.2 microseconds, although other rates are possible. When the periodic interrupt occurs, a main routine is interrupted and execution continues in a periodic interrupt subroutine (block 108). After the occurrence of a periodic interrupt, the microprocessor 95 reads all digital input ports (block 110) and checks the input ports against the their state during the previous execution of the periodic interrupt subroutine (block 112). Each input is checked, and if an input has changed, a timestamp is recorded, e.g., a current value of a free running counter is stored in a corresponding location in the transmit buffer for that input (block 114).

It is necessary to timestamp the transition time of an input on the external I/O device 88 based on the time in the revenue meter 20, 34, 42 since the microprocessors in the revenue meter and external I/O and communications device are not time synchronized,. The external I/O and communications device 88 preferably scans inputs every 819.2 microseconds. When the I/O and communications device 88 sees a transition on an input, it stores the free running counter in the input packet. This free running counter ideally increments every 3.2 microseconds. When the external I/O device is transmitting the input packet to the meter, just before transmitting the last four bytes of the packet, for example, it inserts the current free running counter into the 3<sup>rd</sup> and 4<sup>th</sup> last bytes. This ensures that the free running counter value inserted into the packet is as close as possible to the value it would be at the end of packet transmission. When the revenue meter 20, 34, 42 receives the packet, it calculates the time of transition of any of the inputs with the following formula:

$$t_t = t_n - (f_{pck} - f_{tr} + f_{inh}) * FT$$

where:

$t_t$  = the time of transition.

$t_n$  = the time on the meter at the time the packet is received.

$f_{pck}$  = the free running counter at the time the packet is transmitted.

$f_{tr}$  = the free running counter value when the input was scanned and seen to have transitioned.

5  $f_{inh}$  = the inherent typical number of free running counts from the time that the  $f_{pck}$  is recorded on the I/O and communications device and the packet is received on the revenue meter.

$FT$  = the conversion factor between free running counts and normal time, e.g., 3.2 microseconds/count.

10 Therefore, the only variability left in the calculation of transition time is the variability of  $f_{inh}$  and the accuracy that the revenue meter can timestamp the communications bus receive interrupt.

15 After the timestamp information is recorded, an appropriate mask bit is set in the transmit buffer indicating that the input has changed (block 116). These values are transferred for processing by the revenue meter 20, 34, 42. Thereafter, or if the input had not changed, execution of the periodic interrupt service routine terminates (block 118).

20 Referring to FIG. 12C, once initialization is complete, code execution continues at a main routine (block 120). First, the CONFIG packet is built, as described above, to indicate the configuration of the external I/O device (block 122). The CONFIG packet is continually transmitted to the revenue meter 20, 34, 42 (block 124) until the revenue meter 20, 34, 42 acknowledges the CONFIG packet (block 126). Preferably, code on the microprocessor double buffers the digital input states. Thereafter, the two input packets are initialized  
25 with the actual input states (block 128).

30 The I/O and communications device 88 waits approximately 10 milliseconds (block 130). This delay, coupled with the time to execute the remaining blocks in the main routine, ensures that the I/O and communications device 88 transmits and receives a packet to and from the revenue meter 20, 34, 42 approximately every 13 milliseconds. While other



rates are possible, this rate ensures quick update without overloading the meter. The use of the 13 millisecond delay may be varied depending on a processing power of the revenue meter 20, 34, 42, and how often input states are likely to change. The delay is utilized to reduce the flow of data packets that the revenue meter 20, 34, 42 is required to process.

A first input data packet buffer and a second input data packet buffer are swapped to ensure that the main routine is transmitting input states from the first buffer while the periodic interrupt routine stores input states in the second buffer (block 132). When the revenue meter's microprocessor receives a packet, it executes a bus interrupt service subroutine (block 132a). This bus interrupt service subroutine swaps the input packet buffers (block 132b) so that the next data received does not overwrite the current data before being processed. The bus interrupt service routine then notifies the main routine (block 146) that a packet has been received (block 132c) and prepares to receive the next packet (block 132d). Thereafter, the bus interrupt service routine terminates (block 132e).

Referring to FIG. 12C, the input data packet is transmitted to the revenue meter 20, 34, 42 (block 134). The CRC for the packet is calculated as the packet is being transmitted so that the Pckt Time element in the packet is as close as possible to the actual value of the free running counter at the end of the packet (block 134). If the CRC was calculated before the packet began transmission, the Pckt Time element of the packet would be offset by the time required to calculate the CRC and transmit the packet. In addition, the Mask in the transmitted packet is cleared so that the second buffer can be used by the interrupt routine the next time the buffers are swapped (block 136).

While the input data packet is being transmitted, an output data packet is being received since the bus is full duplex (block 138). The output data packet's CRC is checked (block 140). If the CRC is valid (block 142), the output ports on the microprocessor 95 are updated (block 144), and another 10 milliseconds elapse before the main routine continues (block 130).

Referring also to FIG. 12B, when the main routine requests a state change in

the external I/O and communications device (block 144a), a “place output state” subroutine places the output state into the output buffer (block 144b) and the “place output state subroutine” then terminates (block 144c). If the CRC is invalid, however, execution continues without updating the output ports.

Referring to FIG. 12D, a processing routine is called for processing input states from the I/O and communications device 88 and sending output states to the I/O and communications device (block 146). The processing routine activates power to the external I/O and communications device 88 (block 148). The power switching is accomplished, for example, using a TPS2011A Power Distribution Switch, manufactured by Texas Instruments, located in Dallas, Texas, configured in a manner known in the art. Of course other switches can be used. If a valid CONFIG packet is received from the external I/O and communications device 88 within, for example, a predetermined time period (block 150) execution continues. In other words, execution of the processing routine continues if the bus interrupt subroutine notifies the processing routine of an incoming bus packet that is a valid CONFIG packet (see FIG. 12B, block 132c). In a preferred embodiment, the predetermined time period is one second.

If no valid CONFIG packet is received within one second, the external I/O and communications device 88 is turned off for a predetermined turn off period (block 152) and then turned back on (block 148). In a preferred embodiment, the predetermined turn off period is five seconds. Of course, the one and five second predetermined times may be modified to suit the situation. The I/O and communication device 88 is power cycled to ensure that the I/O and communications device 88 starts code execution from a known state. Turing the I/O and communications device 88 off for five seconds ensures that the I/O and communications device 88 is in communication with the revenue meter 20, 34, 42 fairly quickly after a user plugs in the I/O and communications device 88.

Once a valid CONFIG packet has been received, the revenue meter 20, 34, 42 fills the outgoing bus transmit buffer with a CONFIGACK packet

(block 154). The CONFIGACK packet is transmitted to the external I/O and communications device 88 when the next packet is received from the external I/O and communications device 88. Thereafter, the revenue meter 20, 34, 48 waits for a valid receive/transmit packet operation to complete or for timeout to occur (block 156). In a preferred embodiment, the a duration of the timeout is 50 milliseconds. If a 50 millisecond timeout occurs, the I/O and communications device 88 is either faulty or has been removed since the I/O and communications device 88 transmits packets approximately every 13 milliseconds.

If the timeout occurs, execution continues as though the I/O and communications device 88 is absent (block 152). If a packet is received, the output states are copied from the revenue meter 20, 34, 42 into the bus transmit buffer for transmission the next time the I/O and communications device 88 initiates a packet transaction (block 158). An output state changes when, for example, a user uses the keypad 32 described above to change a fan state from on to off, and off to on, and a set point module overrange can be triggered within the revenue meter 20, 34, 42 to shut down a load. As the microprocessor 95 receives data packets containing the output states, the data packets are processed to acquire the output state information, and the output states are set (block 144). The output state is utilized by relay hardware, for example, to turn a load on or off.

Thereafter, the revenue meter 20, 34, 48 checks the received packet mask for inputs that have changed since the last transaction (block 160). For each input that has changed state, the meter calculates the transition time (block 162), as described above. In either case, the revenue meter 20, 34, 42 reports the input states and transition times to an upper layer of the code responsible for reporting input states to structures which are internally utilized or reported to the user (block 164), and waits for the next packet (block 156).

From the foregoing description, it should be understood that improved revenue meter interfaces have been shown and described which have many desirable attributes and advantages. The revenue meter of the present invention provides easily accessible and easy to use interfaces that include a

front panel keypad, and I/O and communications connections. The keypad allows a user to interact with the meter without requiring a breach to a security seal. In addition, the interface provides an external I/O and communications interface that is expandable and not limited to the number of conductors leaving the revenue meter.

It is to be understood that changes and modifications to the embodiments described above will be apparent to those skilled in the art, and are contemplated. It is therefore intended that the foregoing detailed description be regarded as illustrative rather than limiting, and that it be understood that it is the following claims, including all equivalents, that are intended to define the spirit and scope of this invention.

WHAT IS CLAIMED IS:

1. A revenue meter which is enclosed within an enclosure, the revenue meter measuring the delivery of electrical energy from an energy supplier to a consumer through a first electric circuit, the revenue meter comprising:

an interface link;

an I/O device physically separate from the enclosure of the revenue meter, operative to connect said interface link of the revenue meter to said I/O device, wherein said I/O device connects to at least one second electric circuit.

2. The revenue meter according to claim 1, wherein said I/O device further includes a microprocessor operative to process signals within said second electric circuit to communicate at least one I/O signal.

3. The revenue meter according to claim 1, wherein said I/O device is powered by the revenue meter.

4. The revenue meter according to claim 1, wherein the revenue meter accurately timestamps transition times of at least one input of said I/O device.

5. The revenue meter according to claim 1, further comprising:  
bayonet terminals disposed on the revenue meter mateable with matching jaws of a detachable meter mounting device; and  
a seal connected between the revenue meter and said detachable meter mounting device, said seal operative to prevent removal of the revenue meter and indicate tampering with the revenue meter.

6. The revenue meter according to claim 1, further comprising:  
a display;  
terminals disposed on a bottom side of the revenue meter for coupling the revenue meter with the first electric circuit;

a meter cover operative to enclose the revenue meter and said display;

a terminal cover for covering said terminals; and

a first seal connected with said meter cover and operative to prevent removal of said meter cover.

7. The revenue meter according to claim 1, further comprising:

a draw-out chassis coupled with the revenue meter and operative to fit within a switchboard enclosure;

terminals disposed on said chassis for engaging matching terminals within said enclosure;

a display;

a meter cover operative to enclose the revenue meter and said display within said switchboard enclosure; and

a seal connected with said meter cover and operative to prevent removal of said meter cover and indicate tampering with the revenue meter.

8. An I/O device for use with a revenue meter, the revenue meter measuring the delivery of electrical energy from an energy supplier to a consumer through a first electric circuit and including an interface link, the I/O device comprising:

a connector located on the I/O device being operative to connect the I/O device via the interface link to the revenue meter, wherein the I/O device is physically separate from the revenue meter; and

a microprocessor operative to process and communicate at least one I/O signal.

## ABSTRACT OF THE DISCLOSURE

A revenue meter includes electronics for measuring the delivery of electrical energy from an energy supplier to a consumer through an electric circuit. An interface link connects to the revenue meter. An I/O and communications device connects the interface link to the electric circuit. The I/O and communications device uses a serial interface to communicate with the revenue meter. The I/O and communications device provides one or more of analog inputs and outputs, digital inputs and outputs, and communications ports.

5

10

11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65  
66  
67  
68  
69  
70  
71  
72  
73  
74  
75  
76  
77  
78  
79  
80  
81  
82  
83  
84  
85  
86  
87  
88  
89  
90  
91  
92  
93  
94  
95  
96  
97  
98  
99  
100  
101  
102  
103  
104  
105  
106  
107  
108  
109  
110  
111  
112  
113  
114  
115  
116  
117  
118  
119  
120  
121  
122  
123  
124  
125  
126  
127  
128  
129  
130  
131  
132  
133  
134  
135  
136  
137  
138  
139  
140  
141  
142  
143  
144  
145  
146  
147  
148  
149  
150  
151  
152  
153  
154  
155  
156  
157  
158  
159  
160  
161  
162  
163  
164  
165  
166  
167  
168  
169  
170  
171  
172  
173  
174  
175  
176  
177  
178  
179  
180  
181  
182  
183  
184  
185  
186  
187  
188  
189  
190  
191  
192  
193  
194  
195  
196  
197  
198  
199  
200  
201  
202  
203  
204  
205  
206  
207  
208  
209  
210  
211  
212  
213  
214  
215  
216  
217  
218  
219  
220  
221  
222  
223  
224  
225  
226  
227  
228  
229  
230  
231  
232  
233  
234  
235  
236  
237  
238  
239  
240  
241  
242  
243  
244  
245  
246  
247  
248  
249  
250  
251  
252  
253  
254  
255  
256  
257  
258  
259  
260  
261  
262  
263  
264  
265  
266  
267  
268  
269  
270  
271  
272  
273  
274  
275  
276  
277  
278  
279  
280  
281  
282  
283  
284  
285  
286  
287  
288  
289  
290  
291  
292  
293  
294  
295  
296  
297  
298  
299  
300  
301  
302  
303  
304  
305  
306  
307  
308  
309  
310  
311  
312  
313  
314  
315  
316  
317  
318  
319  
320  
321  
322  
323  
324  
325  
326  
327  
328  
329  
330  
331  
332  
333  
334  
335  
336  
337  
338  
339  
340  
341  
342  
343  
344  
345  
346  
347  
348  
349  
350  
351  
352  
353  
354  
355  
356  
357  
358  
359  
360  
361  
362  
363  
364  
365  
366  
367  
368  
369  
370  
371  
372  
373  
374  
375  
376  
377  
378  
379  
380  
381  
382  
383  
384  
385  
386  
387  
388  
389  
390  
391  
392  
393  
394  
395  
396  
397  
398  
399  
400  
401  
402  
403  
404  
405  
406  
407  
408  
409  
410  
411  
412  
413  
414  
415  
416  
417  
418  
419  
420  
421  
422  
423  
424  
425  
426  
427  
428  
429  
430  
431  
432  
433  
434  
435  
436  
437  
438  
439  
440  
441  
442  
443  
444  
445  
446  
447  
448  
449  
450  
451  
452  
453  
454  
455  
456  
457  
458  
459  
460  
461  
462  
463  
464  
465  
466  
467  
468  
469  
470  
471  
472  
473  
474  
475  
476  
477  
478  
479  
480  
481  
482  
483  
484  
485  
486  
487  
488  
489  
490  
491  
492  
493  
494  
495  
496  
497  
498  
499  
500  
501  
502  
503  
504  
505  
506  
507  
508  
509  
510  
511  
512  
513  
514  
515  
516  
517  
518  
519  
520  
521  
522  
523  
524  
525  
526  
527  
528  
529  
530  
531  
532  
533  
534  
535  
536  
537  
538  
539  
540  
541  
542  
543  
544  
545  
546  
547  
548  
549  
550  
551  
552  
553  
554  
555  
556  
557  
558  
559  
560  
561  
562  
563  
564  
565  
566  
567  
568  
569  
570  
571  
572  
573  
574  
575  
576  
577  
578  
579  
580  
581  
582  
583  
584  
585  
586  
587  
588  
589  
590  
591  
592  
593  
594  
595  
596  
597  
598  
599  
600  
601  
602  
603  
604  
605  
606  
607  
608  
609  
610  
611  
612  
613  
614  
615  
616  
617  
618  
619  
620  
621  
622  
623  
624  
625  
626  
627  
628  
629  
630  
631  
632  
633  
634  
635  
636  
637  
638  
639  
640  
641  
642  
643  
644  
645  
646  
647  
648  
649  
650  
651  
652  
653  
654  
655  
656  
657  
658  
659  
660  
661  
662  
663  
664  
665  
666  
667  
668  
669  
670  
671  
672  
673  
674  
675  
676  
677  
678  
679  
680  
681  
682  
683  
684  
685  
686  
687  
688  
689  
690  
691  
692  
693  
694  
695  
696  
697  
698  
699  
700  
701  
702  
703  
704  
705  
706  
707  
708  
709  
710  
711  
712  
713  
714  
715  
716  
717  
718  
719  
720  
721  
722  
723  
724  
725  
726  
727  
728  
729  
730  
731  
732  
733  
734  
735  
736  
737  
738  
739  
740  
741  
742  
743  
744  
745  
746  
747  
748  
749  
750  
751  
752  
753  
754  
755  
756  
757  
758  
759  
760  
761  
762  
763  
764  
765  
766  
767  
768  
769  
770  
771  
772  
773  
774  
775  
776  
777  
778  
779  
780  
781  
782  
783  
784  
785  
786  
787  
788  
789  
790  
791  
792  
793  
794  
795  
796  
797  
798  
799  
800  
801  
802  
803  
804  
805  
806  
807  
808  
809  
810  
811  
812  
813  
814  
815  
816  
817  
818  
819  
820  
821  
822  
823  
824  
825  
826  
827  
828  
829  
830  
831  
832  
833  
834  
835  
836  
837  
838  
839  
840  
841  
842  
843  
844  
845  
846  
847  
848  
849  
850  
851  
852  
853  
854  
855  
856  
857  
858  
859  
860  
861  
862  
863  
864  
865  
866  
867  
868  
869  
870  
871  
872  
873  
874  
875  
876  
877  
878  
879  
880  
881  
882  
883  
884  
885  
886  
887  
888  
889  
890  
891  
892  
893  
894  
895  
896  
897  
898  
899  
900  
901  
902  
903  
904  
905  
906  
907  
908  
909  
910  
911  
912  
913  
914  
915  
916  
917  
918  
919  
920  
921  
922  
923  
924  
925  
926  
927  
928  
929  
930  
931  
932  
933  
934  
935  
936  
937  
938  
939  
940  
941  
942  
943  
944  
945  
946  
947  
948  
949  
950  
951  
952  
953  
954  
955  
956  
957  
958  
959  
960  
961  
962  
963  
964  
965  
966  
967  
968  
969  
970  
971  
972  
973  
974  
975  
976  
977  
978  
979  
980  
981  
982  
983  
984  
985  
986  
987  
988  
989  
990  
991  
992  
993  
994  
995  
996  
997  
998  
999  
1000  
1001  
1002  
1003  
1004  
1005  
1006  
1007  
1008  
1009  
1010  
1011  
1012  
1013  
1014  
1015  
1016  
1017  
1018  
1019  
1020  
1021  
1022  
1023  
1024  
1025  
1026  
1027  
1028  
1029  
1030  
1031  
1032  
1033  
1034  
1035  
1036  
1037  
1038  
1039  
1040  
1041  
1042  
1043  
1044  
1045  
1046  
1047  
1048  
1049  
1050  
1051  
1052  
1053  
1054  
1055  
1056  
1057  
1058  
1059  
1060  
1061  
1062  
1063  
1064  
1065  
1066  
1067  
1068  
1069  
1070  
1071  
1072  
1073  
1074  
1075  
1076  
1077  
1078  
1079  
1080  
1081  
1082  
1083  
1084  
1085  
1086  
1087  
1088  
1089  
1090  
1091  
1092  
1093  
1094  
1095  
1096  
1097  
1098  
1099  
1100  
1101  
1102  
1103  
1104  
1105  
1106  
1107  
1108  
1109  
1110  
1111  
1112  
1113  
1114  
1115  
1116  
1117  
1118  
1119  
1120  
1121  
1122  
1123  
1124  
1125  
1126  
1127  
1128  
1129  
1130  
1131  
1132  
1133  
1134  
1135  
1136  
1137  
1138  
1139  
1140  
1141  
1142  
1143  
1144  
1145  
1146  
1147  
1148  
1149  
1150  
1151  
1152  
1153  
1154  
1155  
1156  
1157  
1158  
1159  
1160  
1161  
1162  
1163  
1164  
1165  
1166  
1167  
1168  
1169  
1170  
1171  
1172  
1173  
1174  
1175  
1176  
1177  
1178  
1179  
1180  
1181  
1182  
1183  
1184  
1185  
1186  
1187  
1188  
1189  
1190  
1191  
1192  
1193  
1194  
1195  
1196  
1197  
1198  
1199  
1200  
1201  
1202  
1203  
1204  
1205  
1206  
1207  
1208  
1209  
1210  
1211  
1212  
1213  
1214  
1215  
1216  
1217  
1218  
1219  
1220  
1221  
1222  
1223  
1224  
1225  
1226  
1227  
1228  
1229  
1230  
1231  
1232  
1233  
1234  
1235  
1236  
1237  
1238  
1239  
1240  
1241  
1242  
1243  
1244  
1245  
1246  
1247  
1248  
1249  
1250  
1251  
1252  
1253  
1254  
1255  
1256  
1257  
1258  
1259  
1260  
1261  
1262  
1263  
1264  
1265  
1266  
1267  
1268  
1269  
1270  
1271  
1272  
1273  
1274  
1275  
1276  
1277  
1278  
1279  
1280  
1281  
1282  
1283  
1284  
1285  
1286  
1287  
1288  
1289  
1290  
1291  
1292  
1293  
1294  
1295  
1296  
1297  
1298  
1299  
1300  
1301  
1302  
1303  
1304  
1305  
1306  
1307  
1308  
1309  
1310  
1311  
1312  
1313  
1314  
1315  
1316  
1317  
1318  
1319  
1320  
1321  
1322  
1323  
1324  
1325  
1326  
1327  
1328  
1329  
1330  
1331  
1332  
1333  
1334  
1335  
1336  
1337  
1338  
1339  
1340  
1341  
1342  
1343  
1344  
1345  
1346  
1347  
1348  
1349  
1350  
1351  
1352  
1353  
1354  
1355  
1356  
1357  
1358  
1359  
1360  
1361  
1362  
1363  
1364  
1365  
1366  
1367  
1368  
1369  
1370  
1371  
1372  
1373  
1374  
1375  
1376  
1377  
1378  
1379  
1380  
1381  
1382  
1383  
1384  
1385  
1386  
1387  
1388  
1389  
1390  
1391  
1392  
1393  
1394  
1395  
1396  
1397  
1398  
1399  
1400  
1401  
1402  
1403  
1404  
1405  
1406  
1407  
1408  
1409  
1410  
1411  
1412  
1413  
1414  
1415  
1416  
1417  
1418  
1419  
1420  
1421  
1422  
1423  
1424  
1425  
1426  
1427  
1428  
1429  
1430  
1431  
1432  
1433  
1434  
1435  
1436  
1437  
1438  
1439  
1440  
1441  
1442  
1443  
1444  
1445  
1446  
1447  
1448  
1449  
1450  
1451  
1452  
1453  
1454  
1455  
1456  
1457  
1458  
1459  
1460  
1461  
1462  
1463  
1464  
1465  
1466  
1467  
1468  
1469  
1470  
1471  
1472  
1473  
1474  
1475  
1476  
1477  
1478  
1479  
1480  
1481  
1482  
1483  
1484  
1485  
1486  
1487  
1488  
1489  
1490  
1491  
1492  
1493  
1494  
1495  
1496  
1497  
1498  
1499  
1500  
1501  
1502  
1503  
1504  
1505  
1506  
1507  
1508  
1509  
1510  
1511  
1512  
1513  
1514  
1515  
1516  
1517  
1518  
1519  
1520  
1521  
1522  
1523  
1524  
1525  
1526  
1527  
1528  
1529  
1530  
1531  
1532  
1533  
1534  
1535  
1536  
1537  
1538  
1539  
1540  
1541  
1542  
1543  
1544  
1545  
1546  
1547  
1548  
1549  
1550  
1551  
1552  
1553  
1554  
1555  
1556  
1557  
1558  
1559  
1560  
1561  
1562  
1563  
1564  
1565  
1566  
1567  
1568  
1569  
1570  
1571  
1572  
1573  
1574  
1575  
1576  
1577  
1578  
1579  
1580  
1581  
1582  
1583  
1584  
1585  
1586  
1587  
1588  
1589  
1590  
1591  
1592  
1593  
1594  
1595  
1596  
1597  
1598  
1599  
1600  
1601  
1602  
1603  
1604  
1605  
1606  
1607  
1608  
1609  
1610  
1611  
1612  
1613  
1614  
1615  
1616  
1617  
1618  
1619  
1620  
1621  
1622  
1623  
1624  
1625  
1626  
1627  
1628  
1629  
1630  
1631  
1632  
1633  
1634  
1635  
1636  
1637  
1638  
1639  
1640  
1641  
1642  
1643  
1644  
1645  
1646  
1647  
1648  
1649  
1650  
1651  
1652  
1653  
1654  
1655  
1656  
1657  
1658  
1659  
1660  
1661  
1662  
1663  
1664  
1665  
1666  
1667  
1668  
1669  
1670  
1671  
1672  
1673  
1674  
1675  
1676  
1677  
1678  
1679  
1680  
1681  
1682  
1683  
1684  
1685  
1686  
1687  
1688  
1689  
1690  
1691  
1692  
1693  
1694  
1695  
1696  
1697  
1698  
1699  
1700  
1701  
1702  
1703  
1704  
1705  
1706  
1707  
1708  
1709  
1710  
1711  
1712  
1713  
1714  
1715  
1716  
1717  
1718  
1719  
1720  
1721  
1722  
1723  
1724  
1725  
1726  
1727  
1728  
1729  
1730  
1731  
1732  
1733  
1734  
1735  
1736  
1737  
1738  
1739  
1740  
1741  
1742  
1743  
1744  
1745  
1746  
1747  
1748  
1749  
1750  
1751  
1752  
1753  
1754  
1755  
1756  
1757  
1758  
1759  
1760  
1761  
1762  
1763  
1764  
1765  
1766  
1767  
1768  
1769  
1770  
1771  
1772  
1773  
1774  
1775  
1776  
1777  
1778  
1779  
1780  
1781  
1782  
1783  
1784  
1785  
1786  
1787  
1788  
1789  
1790  
1791  
1792  
1793  
1794  
1795  
1796  
1797  
1798  
1799  
1800  
1801  
1802  
1803  
1804  
1805  
1806  
1807  
1808  
1809  
1810  
1811  
1812  
1813  
1814  
1815  
1816  
1817  
1818  
1819  
1820  
1821  
1822  
1823  
1824  
1825  
1826  
1827  
1828  
1829  
1830  
1831  
1832  
1833  
1834  
1835  
1836  
1837  
1838  
1839  
1840  
1841  
1842  
1843  
1844  
1845  
1846  
1847  
1848  
1849  
1850  
1851  
1852  
1853  
1854  
1855  
1856  
1857  
1858  
1859  
1860  
1861  
1862  
1863  
1864  
1865  
1866  
1867  
1868  
1869  
1870  
1871  
1872  
1873  
1874  
1875  
1876  
1877  
1878  
1879  
1880  
1881  
1882  
1883  
1884  
1885  
1886  
1887  
1888  
1889  
1890  
1891  
1892  
1893  
1894  
1895  
1896  
1897  
1898  
1899  
1900  
1901  
1902  
1903  
1904  
1905  
1906  
1907  
1908  
1909  
1910  
1911  
1912  
1913  
1914  
1915  
1916  
1917  
1918  
1919  
1920  
1921  
1922  
1923  
1924  
1925  
1926  
1927  
1928  
1929  
1930  
1931  
1932  
1933  
1934  
1935  
1936  
1937  
1938  
1939  
1940  
1941  
1942  
1943  
1944  
1945  
1946  
1947  
1948  
1949  
1950  
1951  
1952  
1953  
1954  
1955  
1956  
1957  
1958  
1959  
1960  
1961  
1962  
1963  
1964  
1965  
1966  
1967  
1968  
1969  
1970  
1971  
1972  
1973  
1974  
1975  
1976  
1977  
1978  
1979  
1980  
1981  
1982  
1983  
1984  
1985  
1986  
1987  
1988  
1989  
1990  
1991  
1992  
1993  
1994  
1995  
1996  
1997  
1998  
1999  
2000  
2001  
2002  
2003  
2004  
2005  
2006  
2007  
2008  
2009  
2010  
2011  
2012  
2013  
2014  
2015  
2016  
2017  
2018  
2019  
2020  
2021  
2022  
2023  
2024  
2025  
2026  
2027  
2028  
2029  
2030  
2031  
2032  
2033  
2034  
2035  
2036  
2037  
2038  
2039  
2040  
2041  
2042  
2043  
2044  
2045  
2046  
2047  
2048  
2049  
2050  
2051  
2052  
2053  
2054  
2055  
2056  
2057  
2058  
2059  
2060  
2061  
2062  
2063  
2064  
2065  
2066  
2067  
2068  
2069  
2070  
2071  
2072  
2073  
2074  
2075  
2076  
2077  
2078  
2079  
2080  
2081  
2082  
2083  
2084  
2085  
2086  
2087  
2088  
2089  
2090  
2091  
2092  
2093  
2094  
2095  
2096  
2097  
2098  
2099  
2100  
2101  
2102  
2103  
2104  
2105  
2106  
2107  
2108  
2109  
2110  
2111  
2112  
2113  
2114  
2115  
2116  
2117  
2118  
2119  
2120  
2121  
2122  
2123  
2124  
2125  
2126  
2127  
2128  
2129  
2130  
2131  
2132  
2133  
2134  
2135  
2136  
2137  
2138  
2139  
2140  
2141  
2142  
2143  
2144  
2145  
2146  
2147  
2148  
2149  
2150  
2151  
2152  
2153  
2154  
2155  
2156  
2157  
2158  
2159  
2160  
2161  
2162  
2163  
2164  
2165  
2166  
2167  
2168  
2169  
2170  
2171  
2172  
2173  
2174  
2175  
2176  
2177  
2178  
2179  
2180  
2181  
2182  
2183  
2184  
2185  
2186  
2187  
2188  
2189  
2190  
2191  
2192  
2193  
2194  
2195  
2196  
2197  
2198  
2199  
2200  
2201  
2202  
2203  
2204  
2205

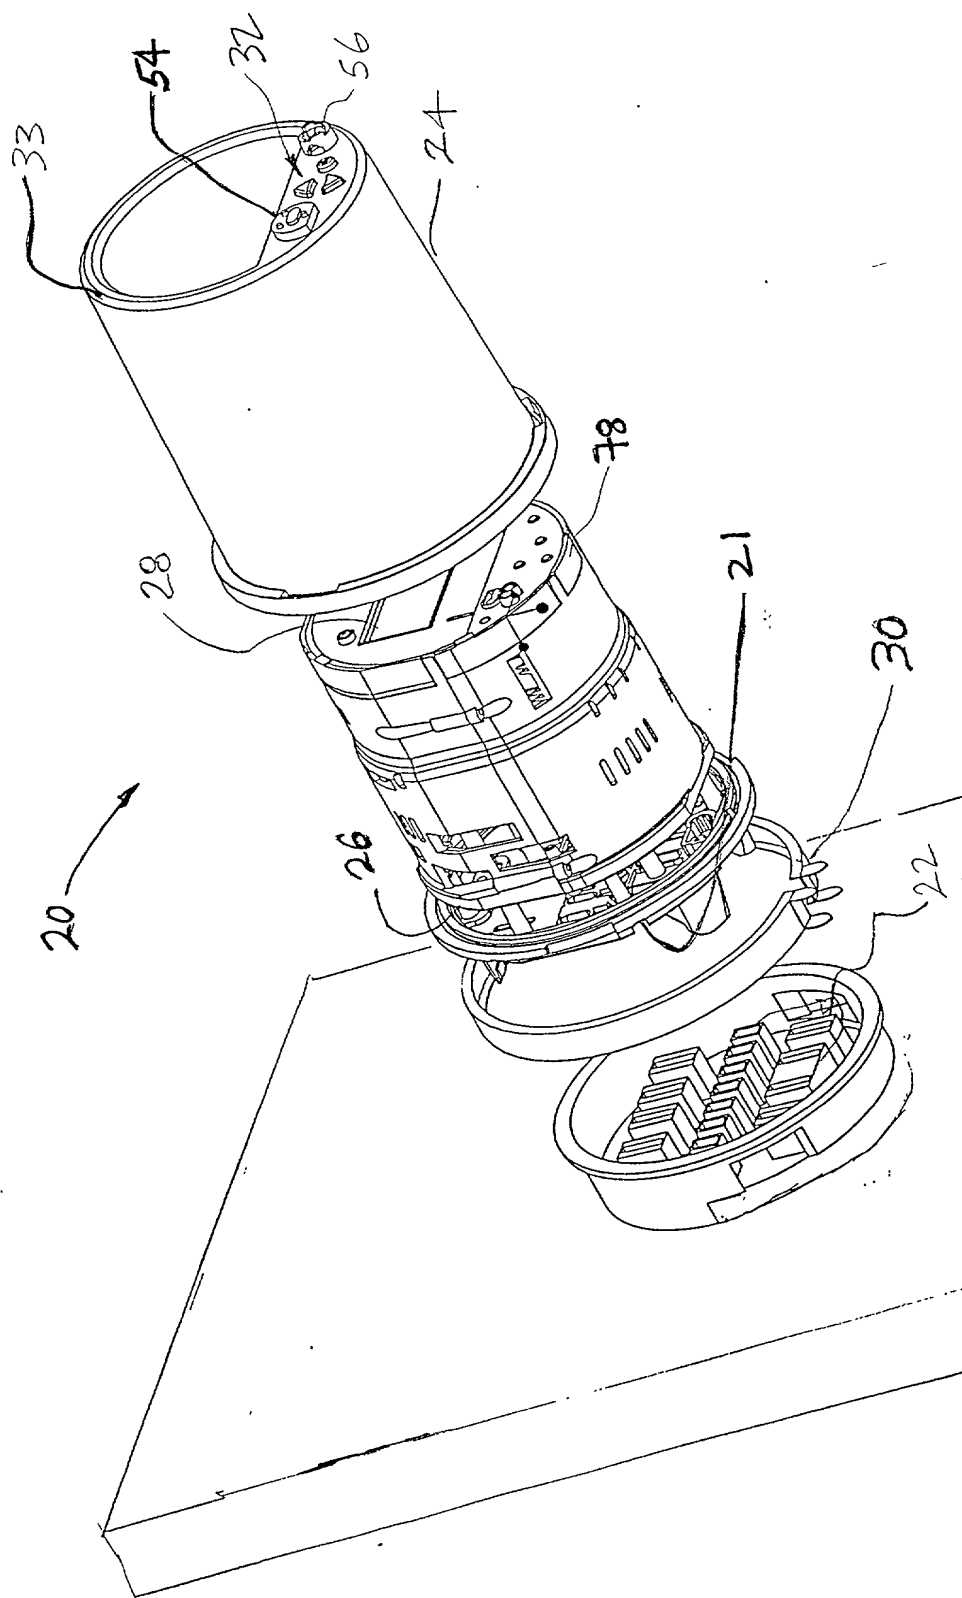


FIG. 1





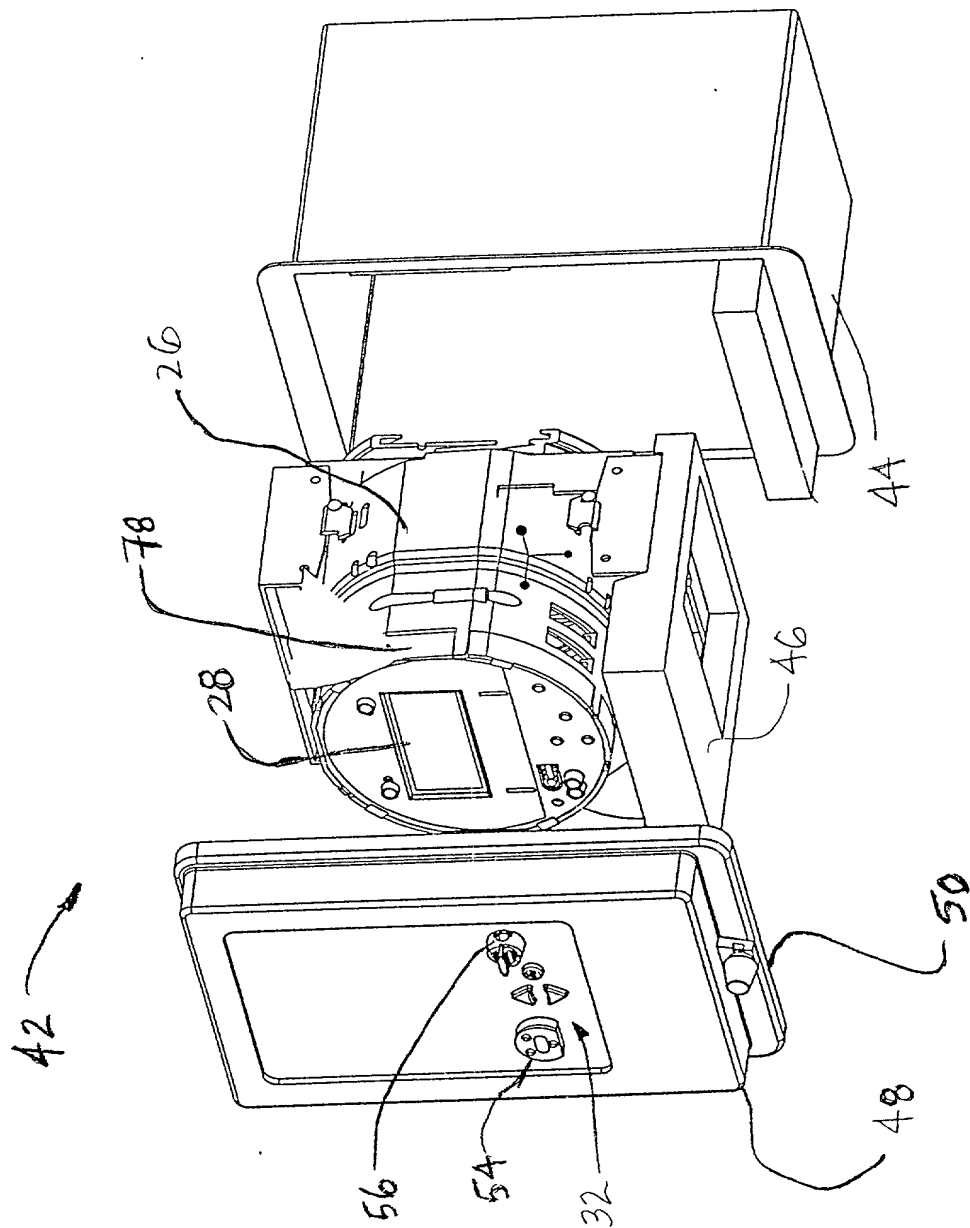


FIG. 3

FIG. 4A

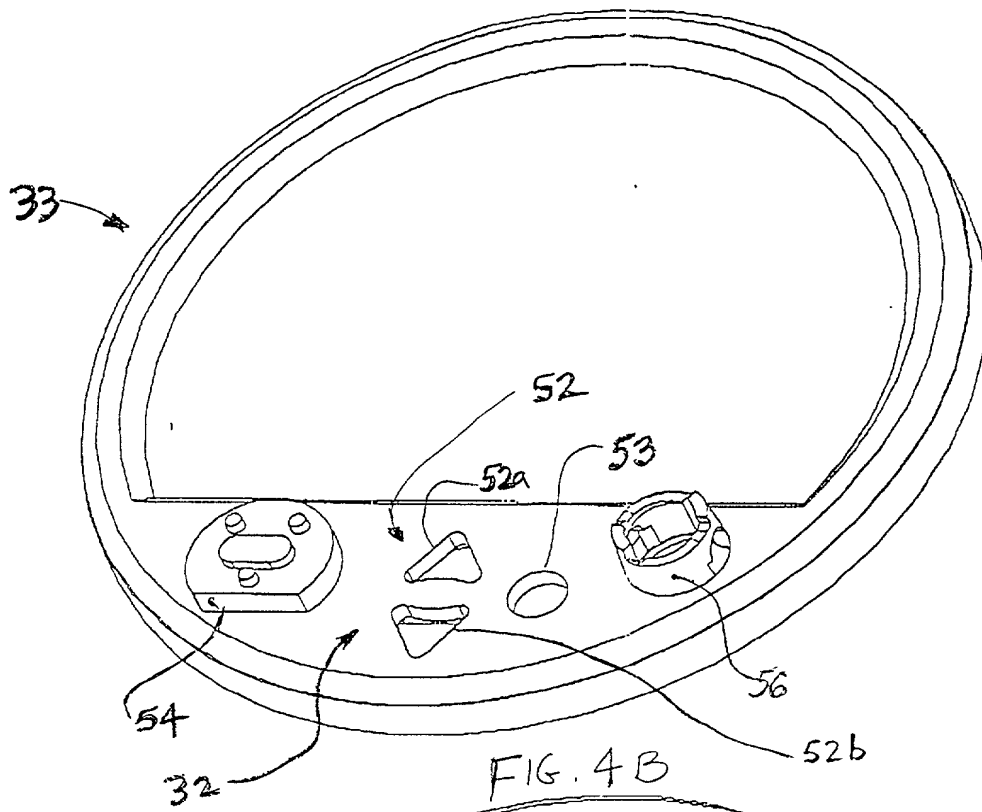
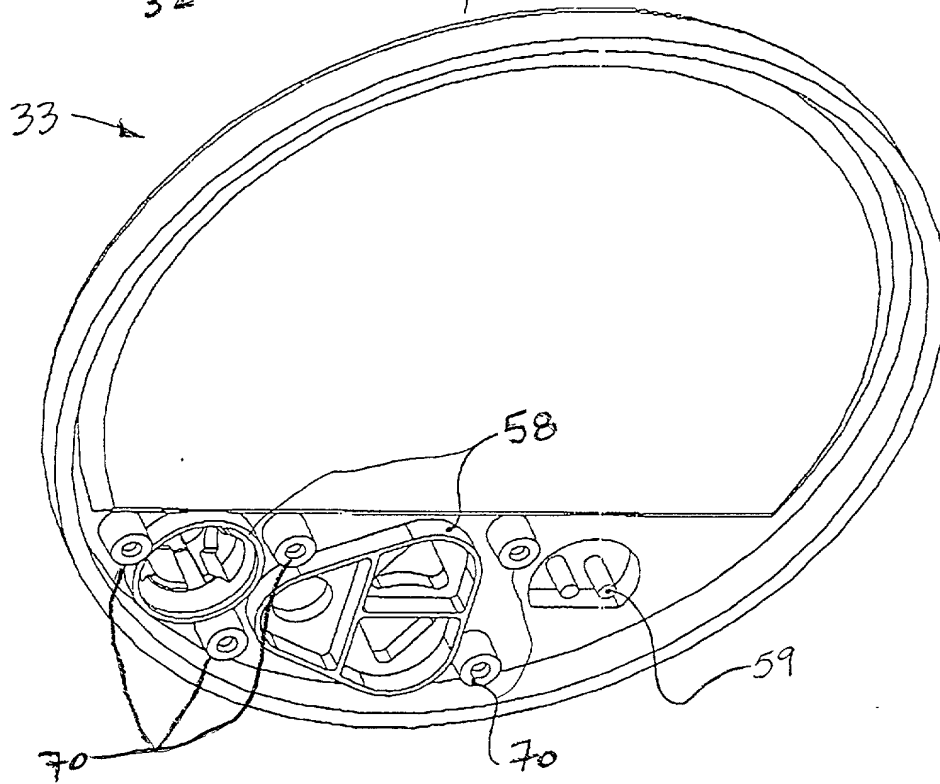
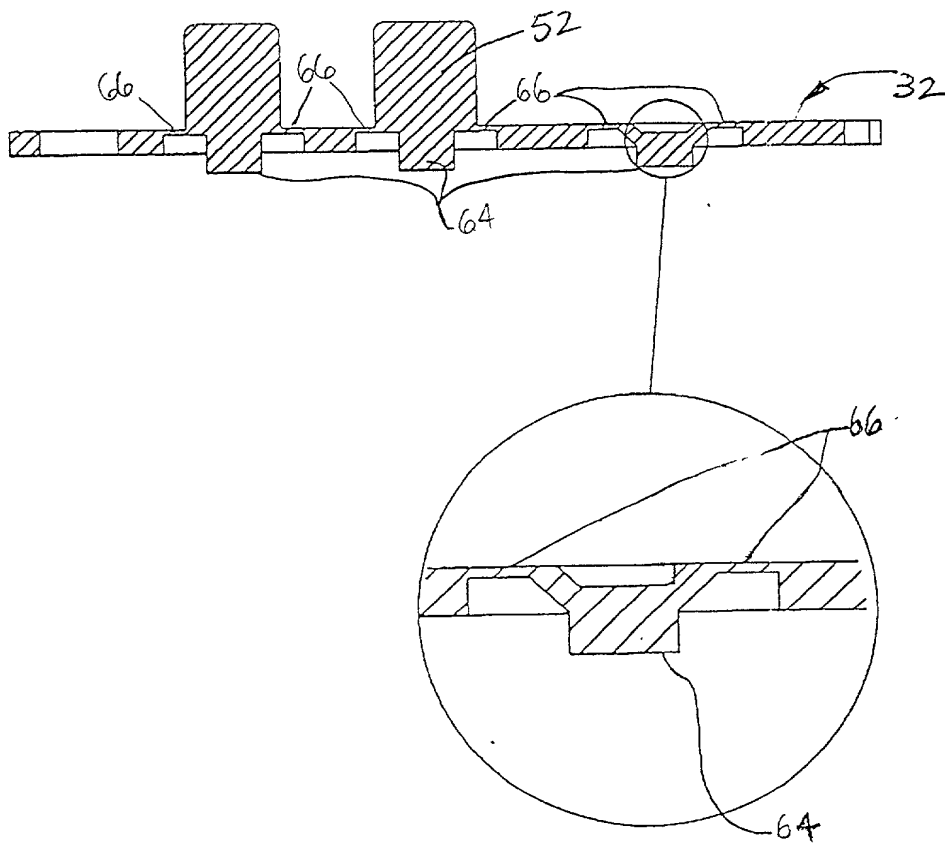


FIG. 4B





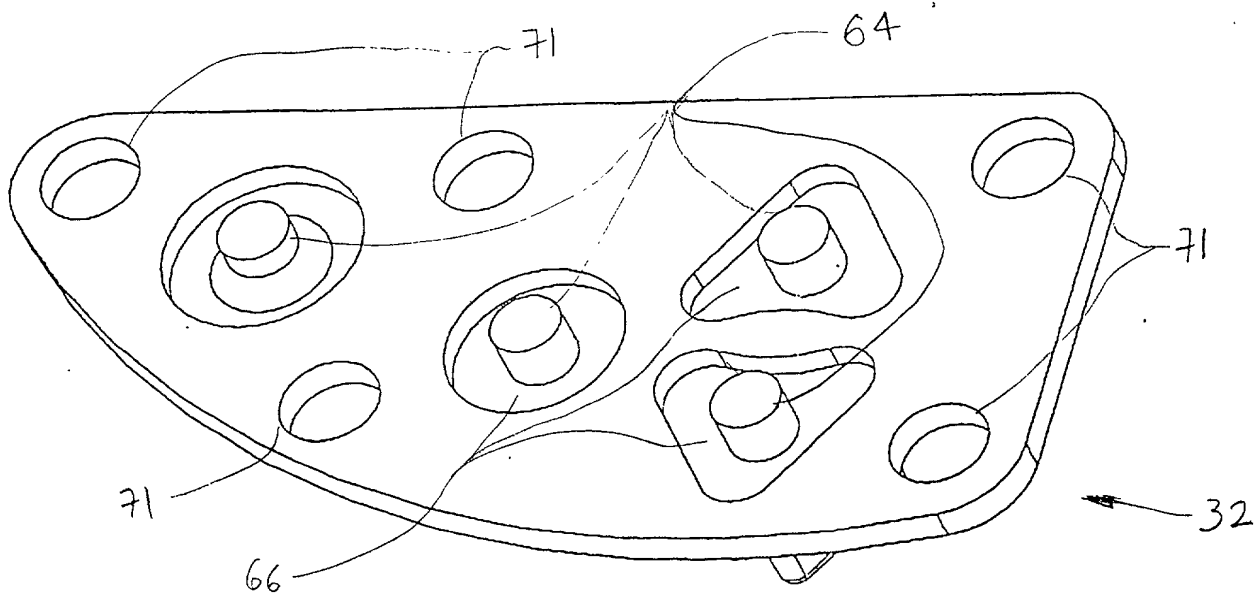


FIG. 5B

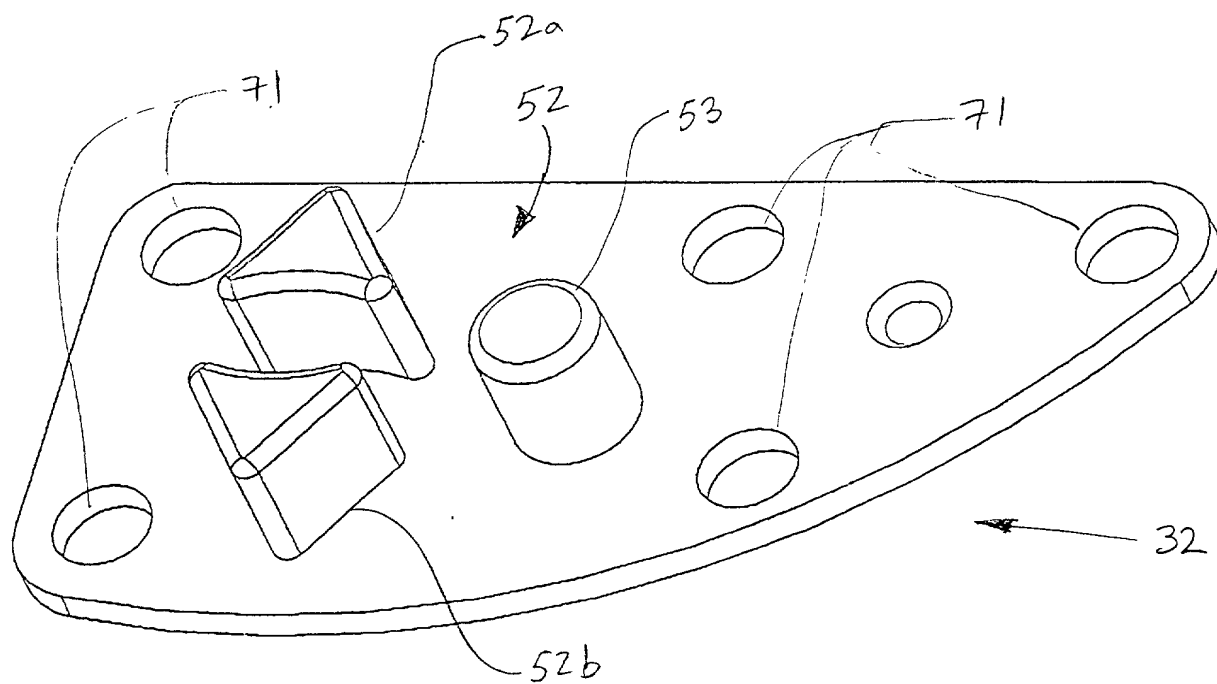


FIG. 5C

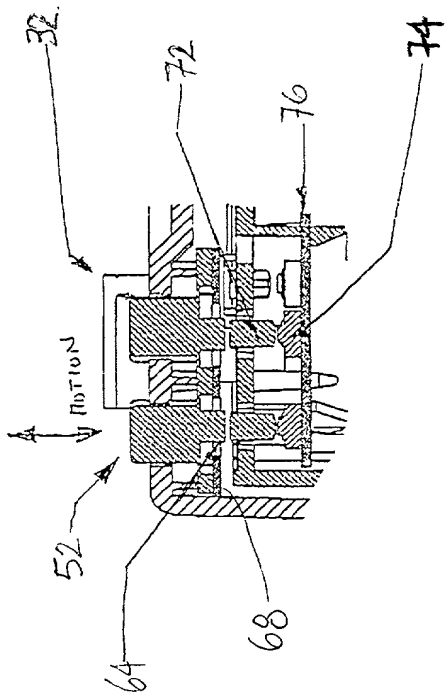


FIG. 6A

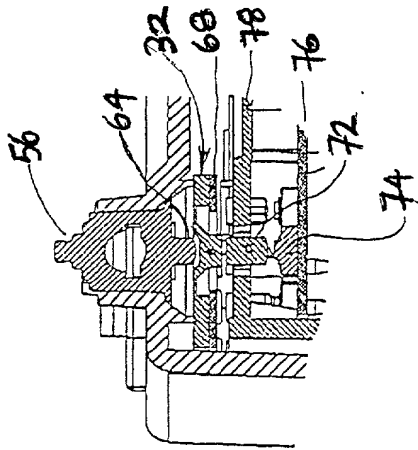


FIG. 6B

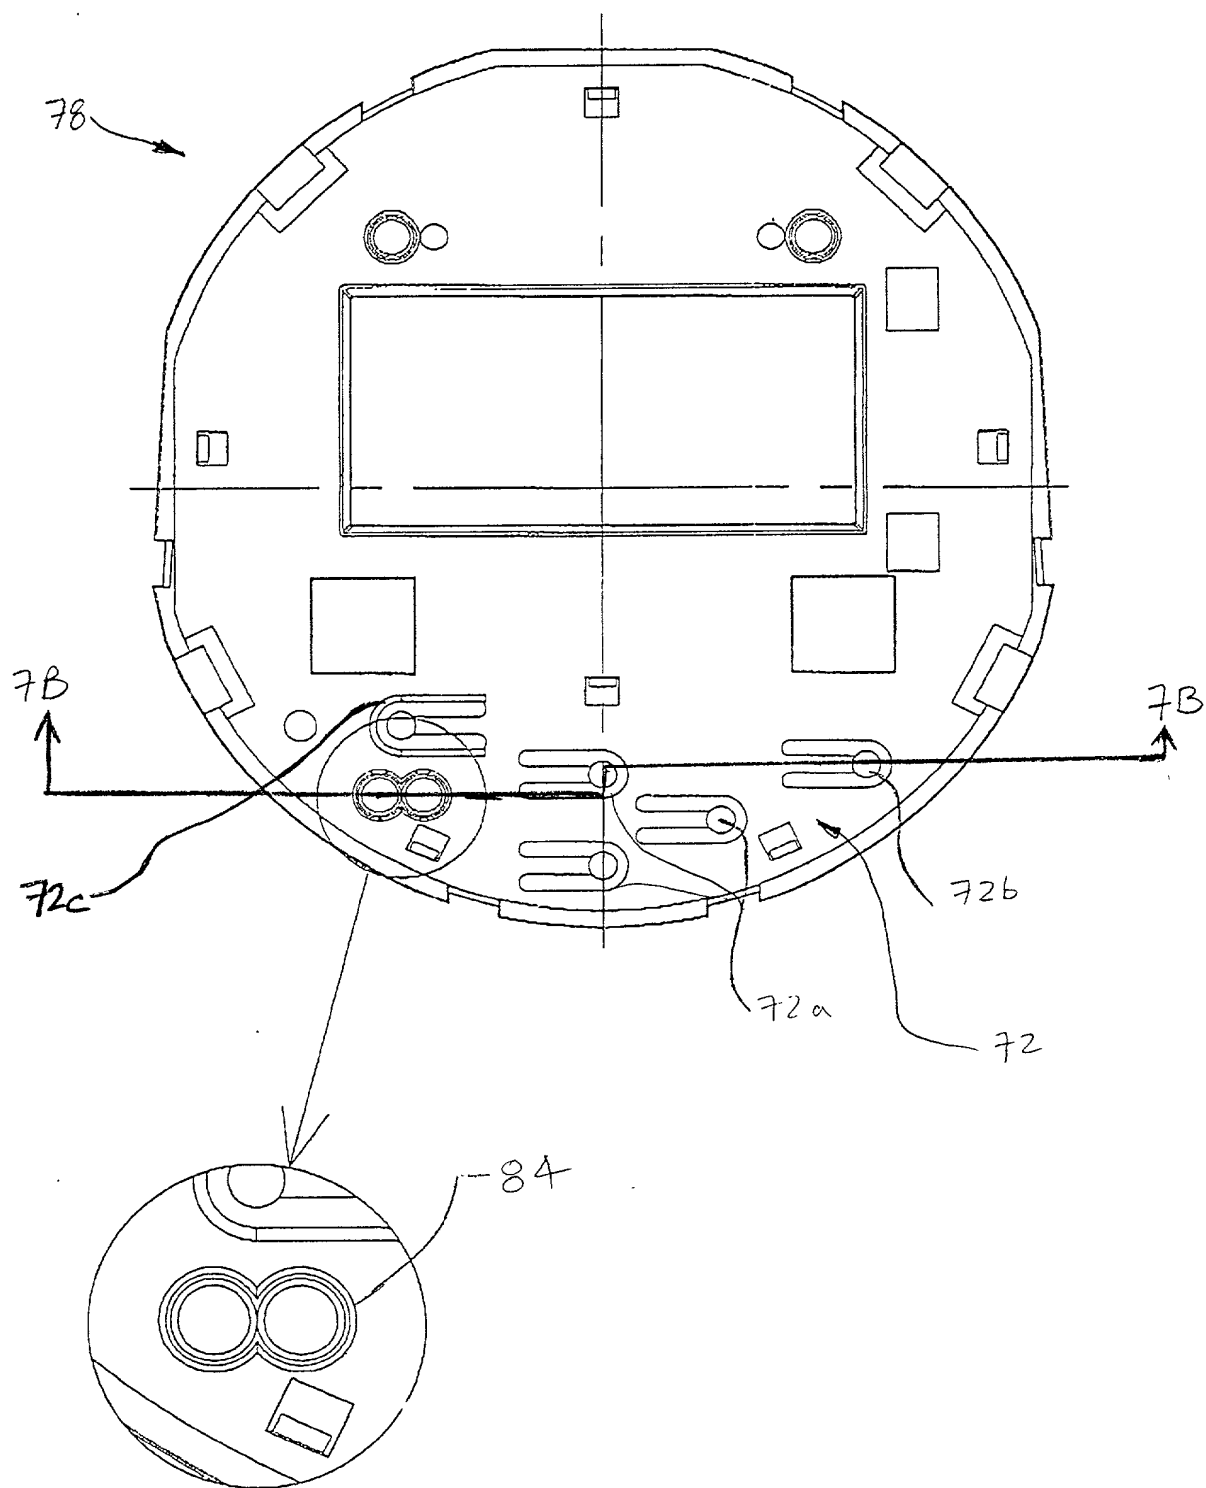


FIG. 7A



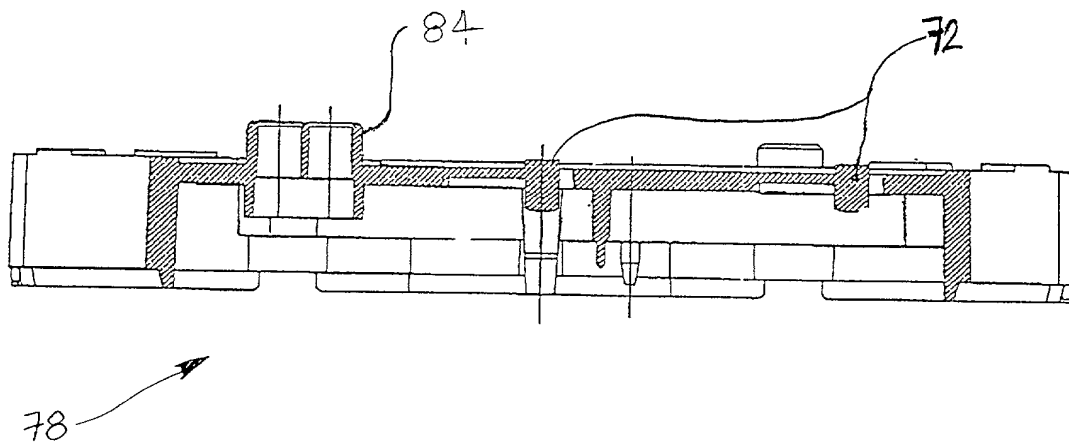


FIG. 7B

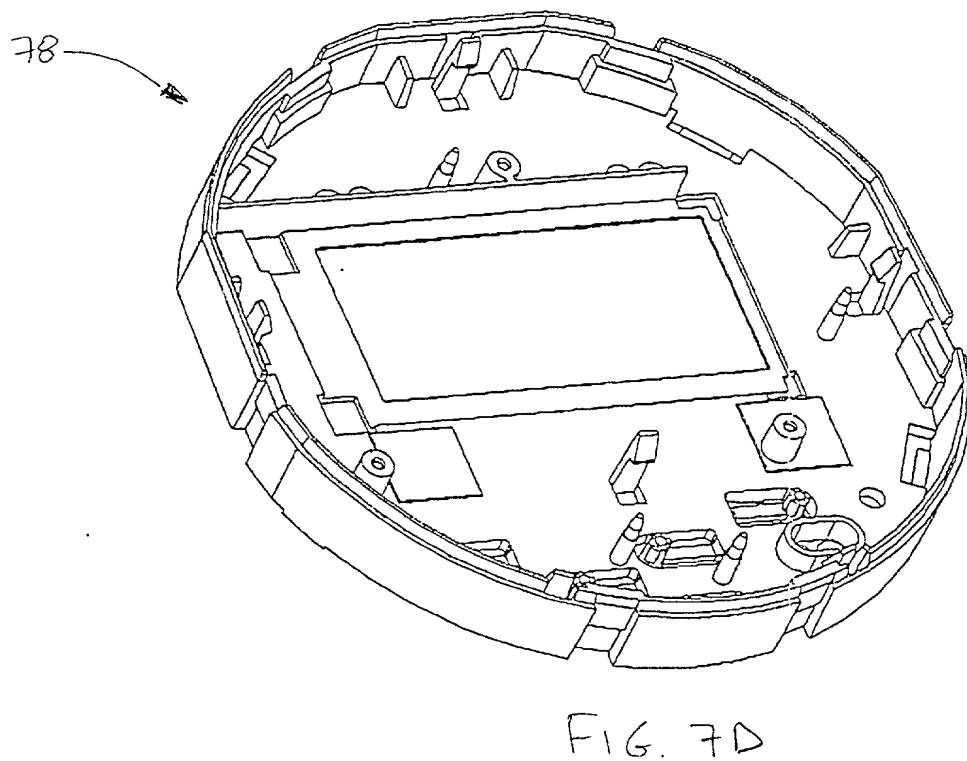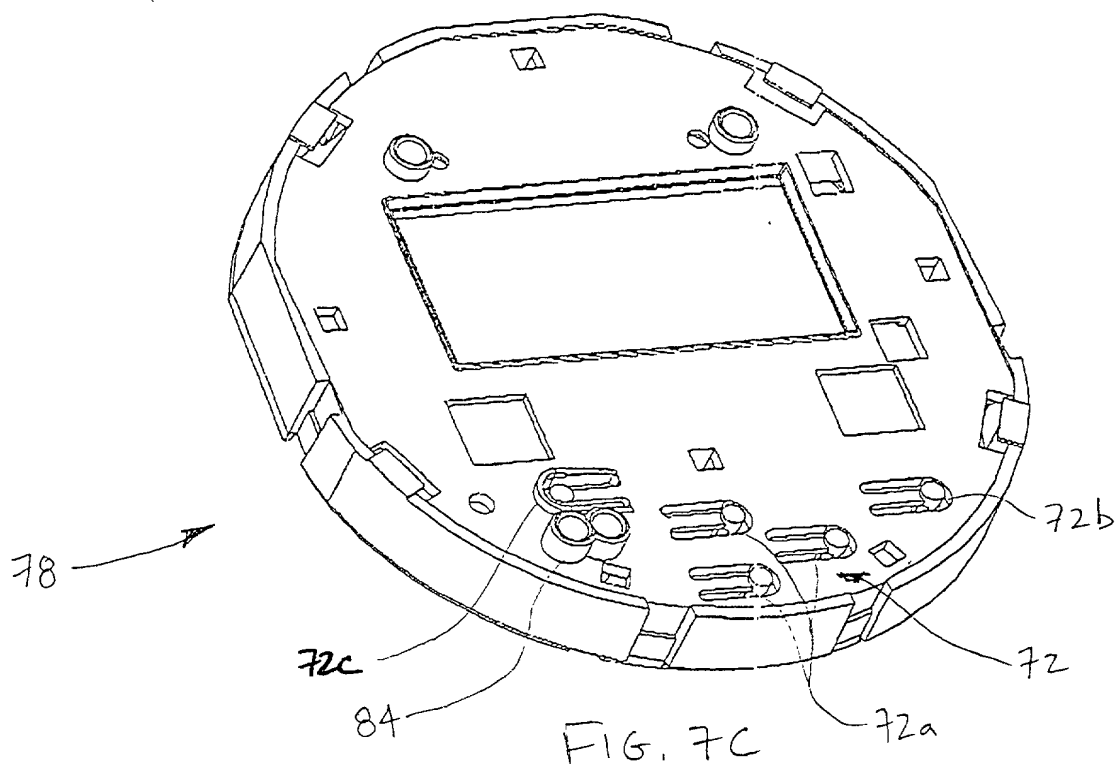

[illegible]

66333 433268

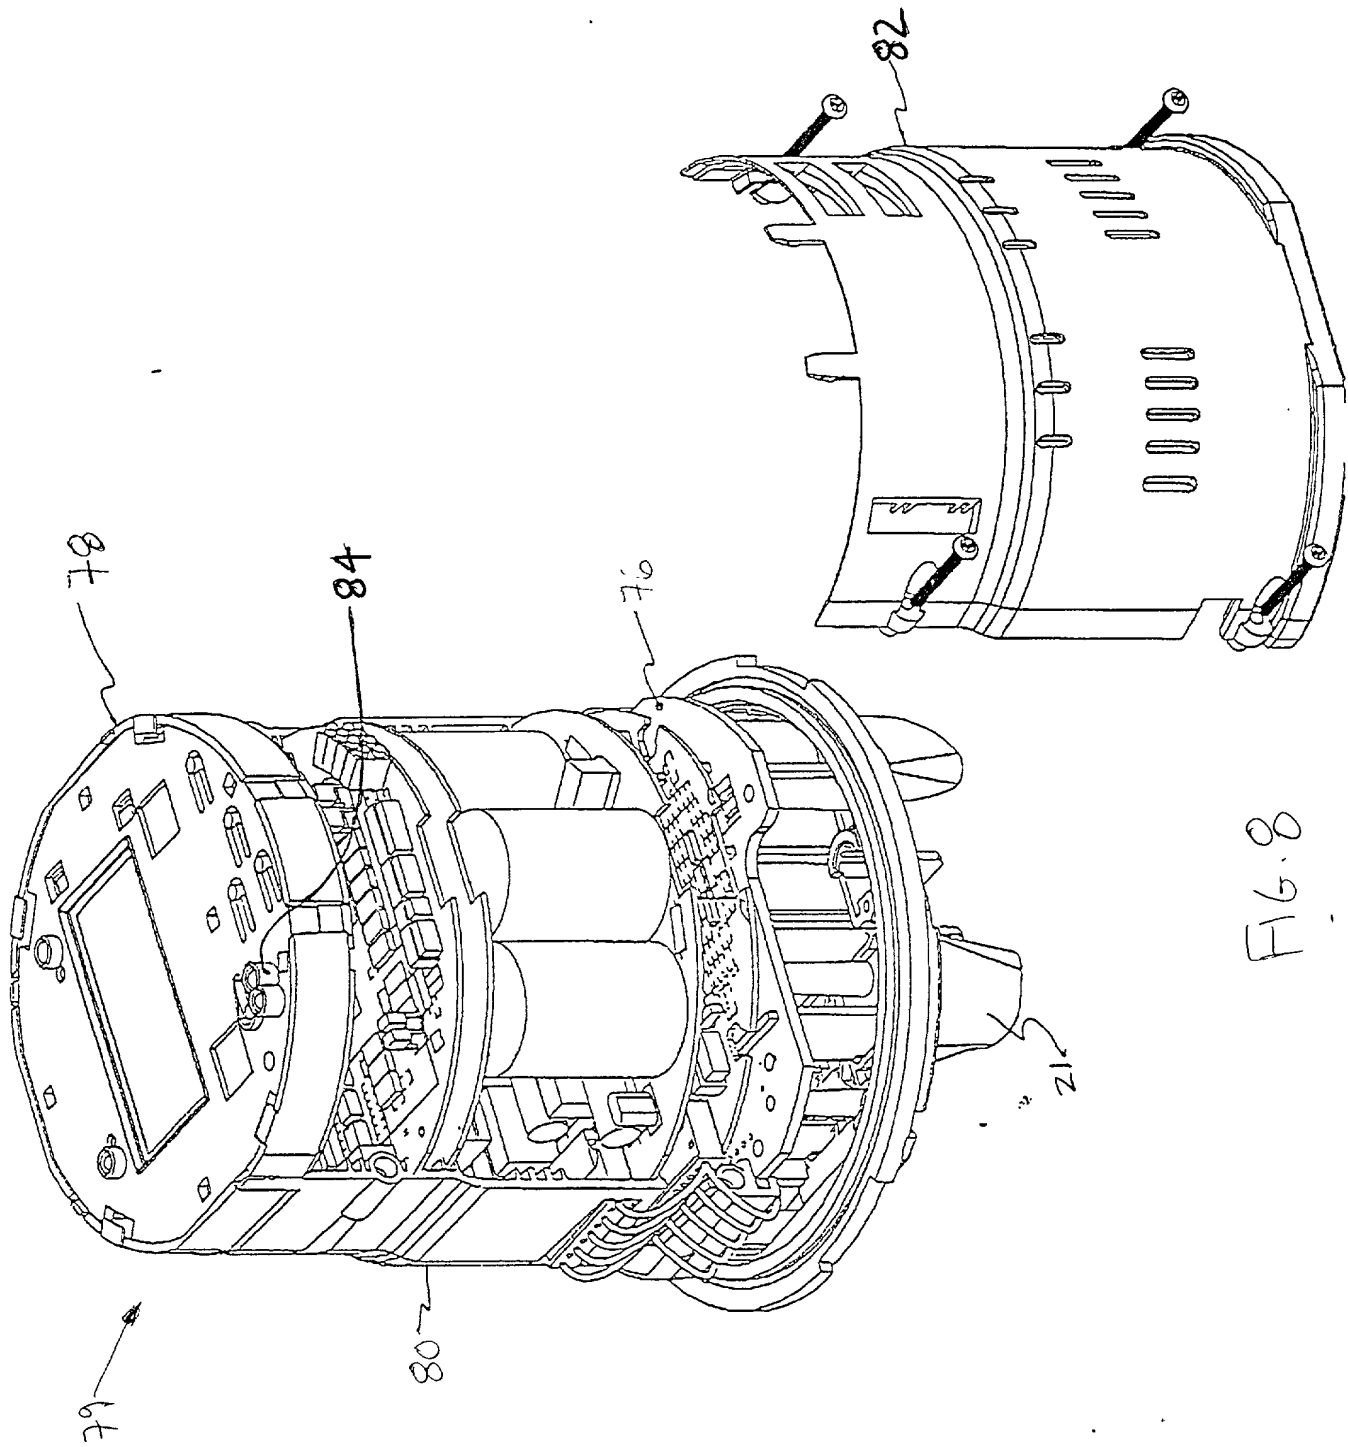


FIG. 8

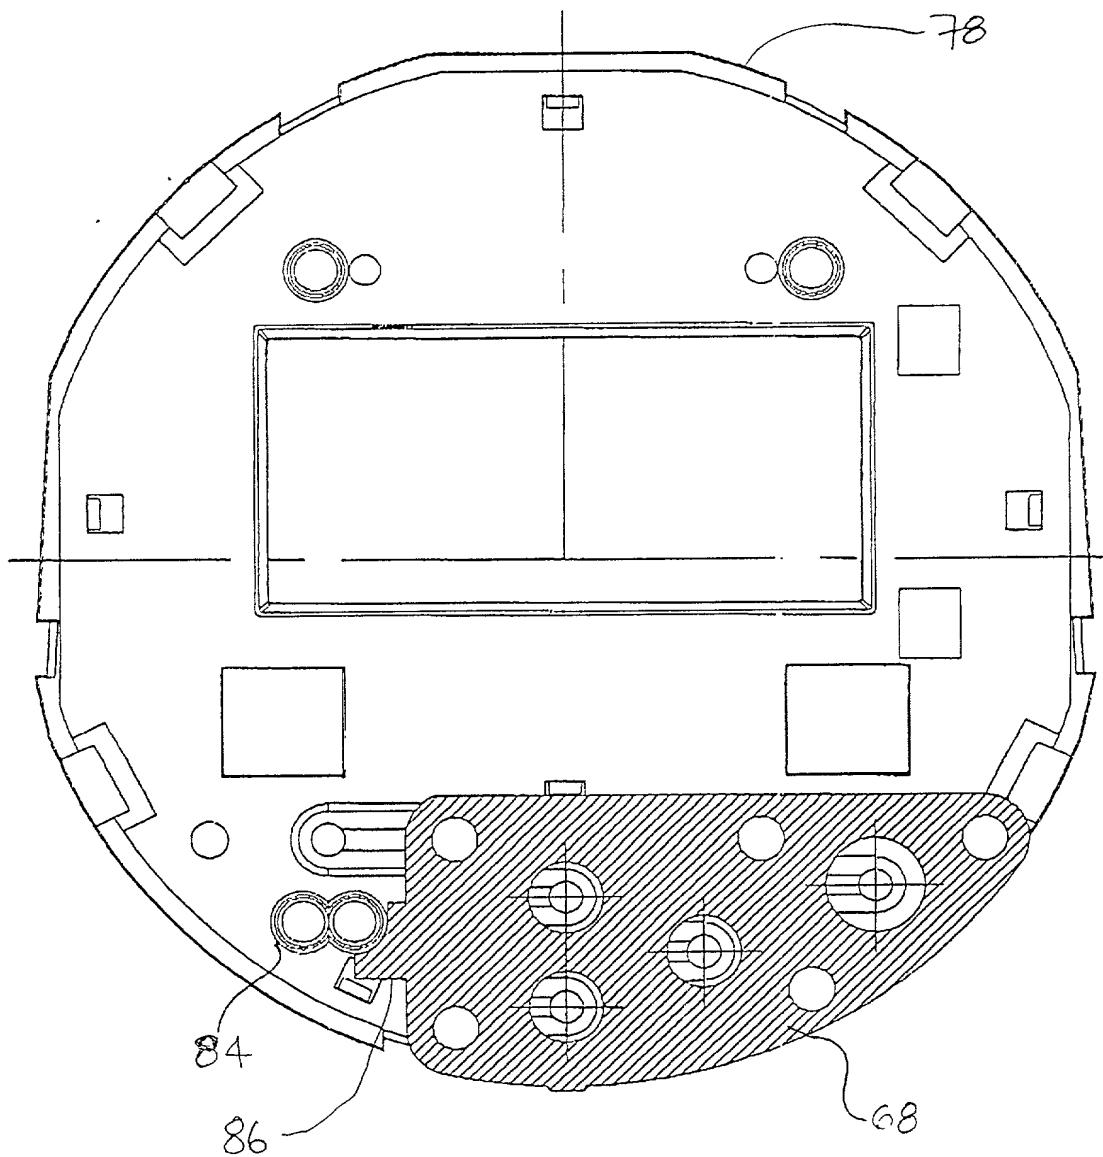


FIG. 9

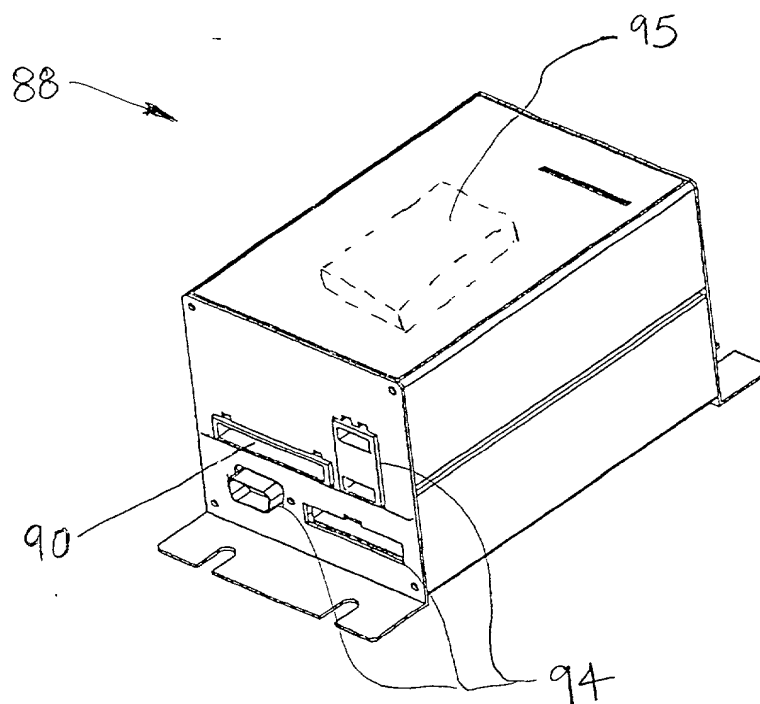


FIG 10

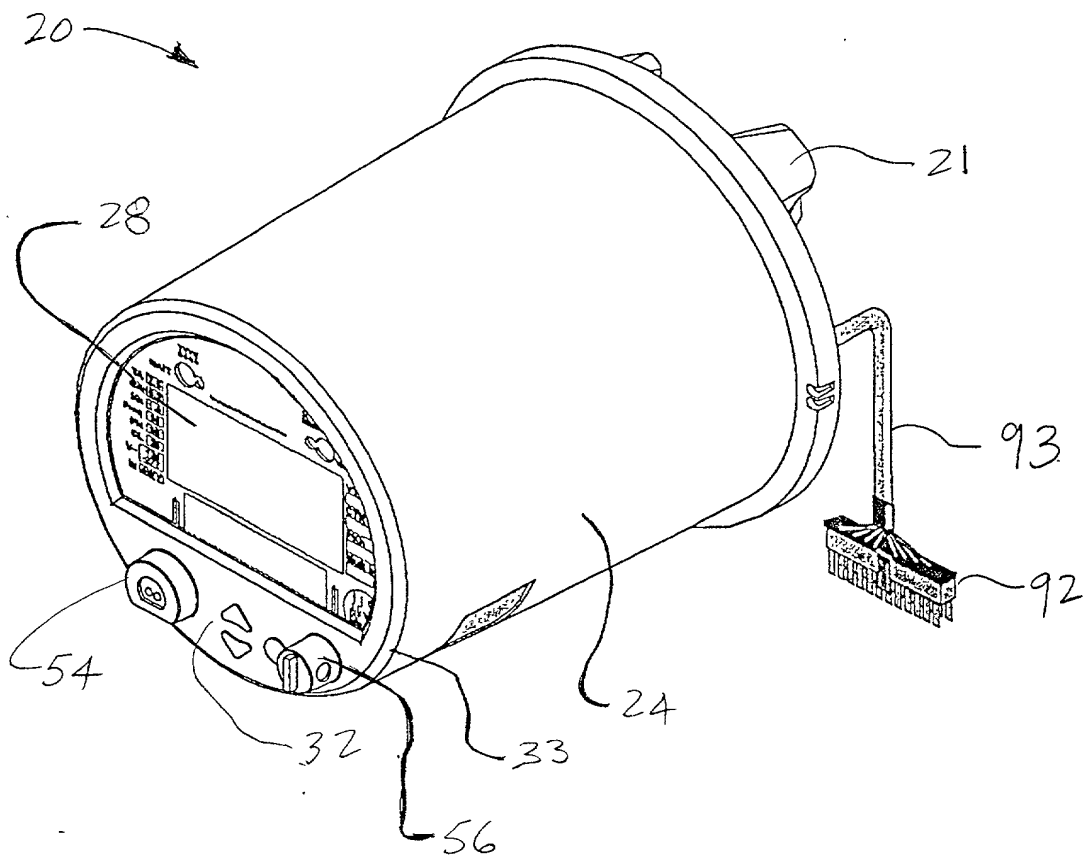


FIG 11

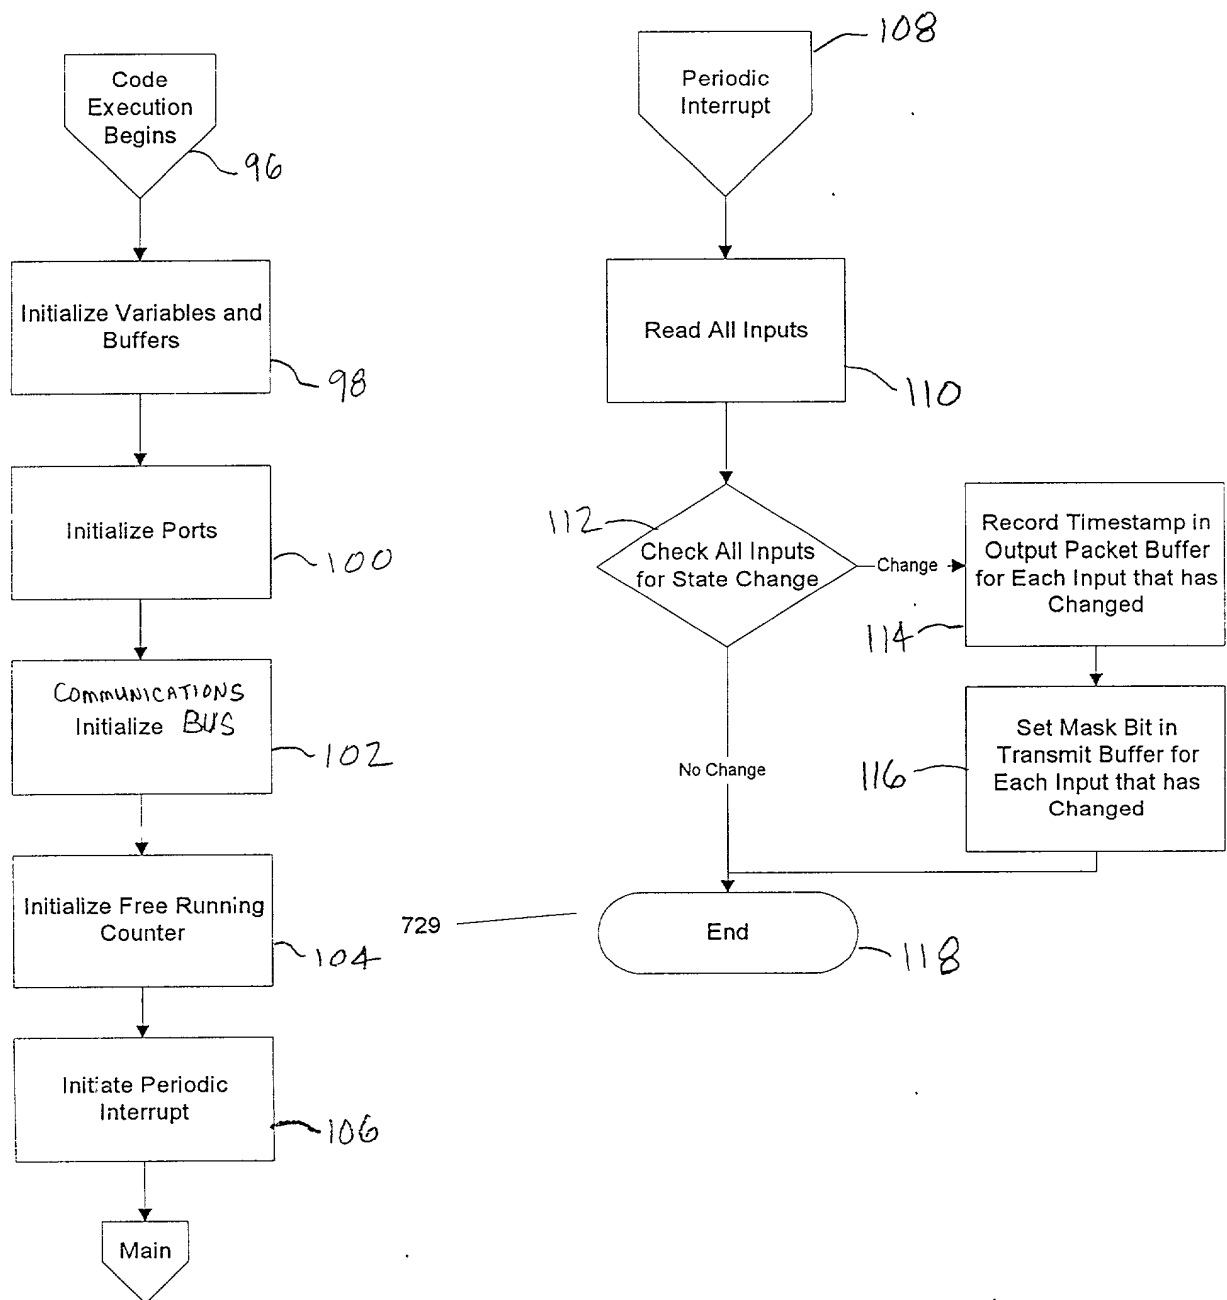


FIG. 12A

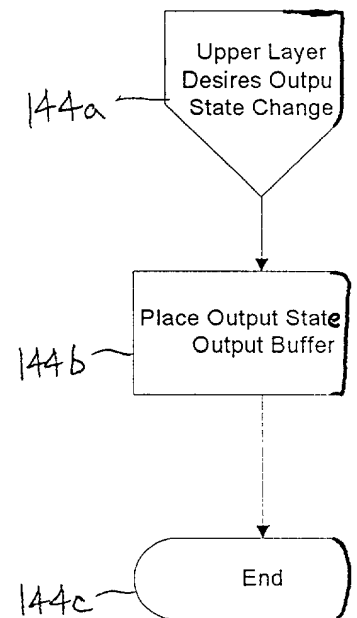
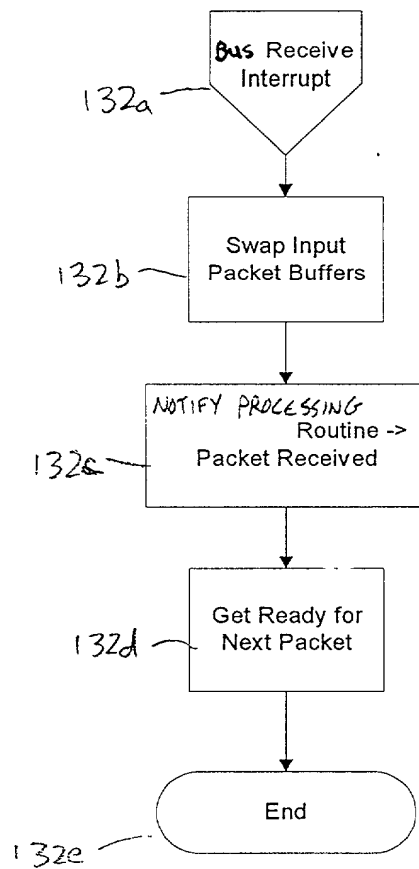
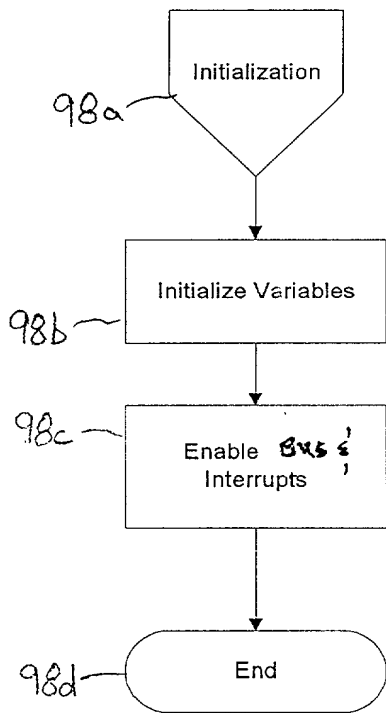


FIG. 12B

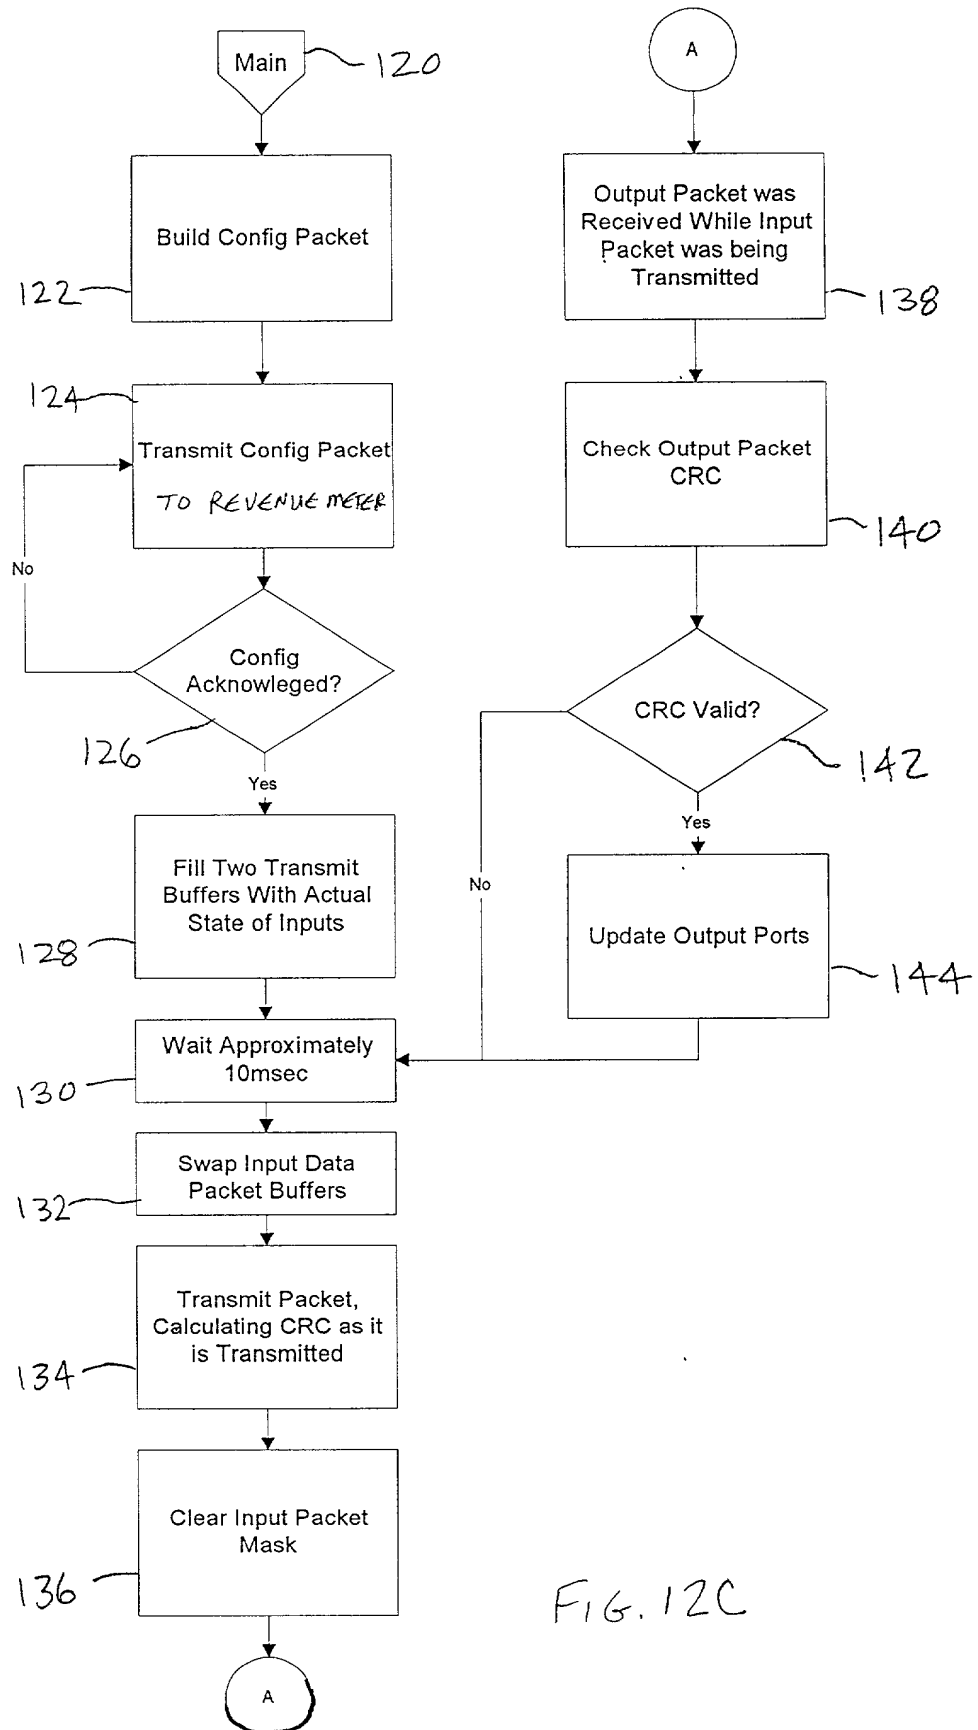


FIG. 12C



